DEVELOPMENT NO.:	21005547			
APPLICANT:	Jim McBryde			
	Sheridan Super Pty Ltd			
ADDRESS:	593 ANZAC HWY GLENELG NORTH SA 5045			
NATURE OF DEVELOPMENT:	Alterations and additions to rear of existing office building			
	including the construction of an addition to the rear of the			
	building and eastern side boundary with a boundary wall			
	height of 4 metres			
ZONING INFORMATION:	Zones:			
	Suburban Business			
	Overlays:			
	Airport Building Heights (Regulated)			
	Advertising Near Signalised Intersections			
	Building Near Airfields			
	Heritage Adjacency			
	Hazards (Flooding - General)			
	Prescribed Wells Area			
	Regulated and Significant Tree			
	Traffic Generating Development			
LODGEMENT DATE:	25 Jun 2021			
RELEVANT AUTHORITY:	Assessment Panel			
PLANNING & DESIGN CODE VERSION:	3 June 2021 Version 2021.7			
CATEGORY OF DEVELOPMENT:	Code Assessed - Performance Assessed			
NOTIFICATION:	Yes			
RECOMMENDING OFFICER:	Dean Spasic			
	Development Officer - Planning,			
REFERRALS STATUTORY:	N/A			
REFERRALS NON-STATUTORY:	N/A			

## **CONTENTS:**

APPENDIX 1: Design Code
ATTACHMENT 1: Proposed Plans
ATTACHMENT 2: Subject Land Map
ATTACHMENT 3: Zoning Map
ATTACHMENT 4: Representations

## **DETAILED DESCRIPTION OF PROPOSAL:**

Alterations and additions to rear of existing office building including the construction of an addition to the rear of the building and eastern side boundary with a boundary wall height of 4 metres

### **BACKGROUND:**

The subject site contains a longstanding office building with car parking at the front and rear. The applicant has sought to increase the floor area of the building in order to facilitate an expansion of the existing land use.

# **SUBJECT LAND & LOCALITY:**

**Site Description:** 

Location reference: 593 ANZAC HWY GLENELG NORTH SA 5045

Title ref.: CT 6123/939 Plan Parcel: D91328 AL101 Council: CITY OF HOLDFAST BAY

The site is a long, rectangular shaped allotment on a north to south axis, the existing office building is located in the centre of the site with primary car parking adjacent to Anzac Highway. The site also has a long driveway 'handle' which provides secondary access to Buckle Street.

### Locality

The locality comprises a mix of residential and non-residential land uses. Immediately north and east of the site is residential, and immediately west and south is non-residential, in the form of offices, consulting rooms, shops and the like.

#### **CONSENT TYPE REQUIRED:**

**Planning Consent** 

#### **CATEGORY OF DEVELOPMENT:**

#### • PER ELEMENT:

Other - Commercial/Industrial - addition to existing office building: Code Assessed - Performance Assessed Partial demolition of a building or structure: Accepted Demolition

#### • OVERALL APPLICATION CATEGORY:

Code Assessed - Performance Assessed

#### REASON

P&D Code; as per Planning Code

#### **PUBLIC NOTIFICATION**

#### REASON

Any kind of development where the site of the development is adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone.

### • LIST OF REPRESENTATIONS

- o Angus McCurdie (Address unknown) submitted a representation stating support for the proposal.
- Unnamed person from 589 Anzac Highway submitted a representation stating no opinion specifically regarding the proposed development, however highlighting concerns with other nearby developments (not related to the proposal).

## SUMMARY

The statements of representations received offer no value to the assessment of this proposal, as they are either generalised or have no reference to the specific proposal.

#### **AGENCY REFERRALS**

N/A

## **INTERNAL REFERRALS**

N/A

#### PLANNING ASSESSMENT

The application has been assessed against the relevant provisions of the Planning & Design Code, which are contained in Appendix One.

#### **Land Use**

The Suburban Business Zone anticipates Offices and other low impact industries, in combination with or adjacent to residential land use. The addition to an existing office is therefore consistent with the land use envisaged in the Zone. The total floor area proposed is less than 400 square metres, therefore consistent with the scale of business development considered appropriate in the context of being adjacent to residential land uses.

#### **Building Height**

The proposed building is single storey, with a maximum building height of 4 metres.

The Zone allows a building height of no greater than 2 building levels or 9 metres total height where it is adjacent to residential development.

#### Setbacks, Design & Appearance

The addition comprises a 6 metre long and 4 metre high boundary wall located along the eastern side boundary, which forms the rear boundary of 3 Pasquin Street.

The Zone seeks to ensure that buildings mitigate impacts of building massing on residential development within a neighbourhood-type zone. This is sought to be achieved by way of a boundary wall having a maximum height of 3 metres and then achieving a 45 degree plane measured from the height of the 3 metre high wall.

The proposed wall exceeds this by way of the boundary wall being 4 metres high, however, the 1 metre height variance is considered reasonable in the context of this site, as per the following considerations:

- o No objections were received from the owner or occupant of 3 Pasquin Street, which is ther most directly affected property; and
- o As per the photo below (supplied via realestate.com.au), the continuation of the 4 metre high beige wall (seen on the left hand side of the photo) extending across the boundary is considered to result in a far better visual outlook, than the existing colorbond fence, and tall alucobond clad parapet, seen in the background.



#### Heritage

There are a group of Local Heritage listed dwellings immediately east of the subject site. The nature of the development however, an addition to an existing commercial building, not visible from public land, and not directly abutting the adjacent heritage buildings, is not considered to impact on the heritage fabric of any of the adjacent heritage places.

### **Traffic Impact, Access and Parking**

The proposed additions are contained within the existing building envelope, therefore there is no change to the car parking required or the alteration to the existing car parking areas.

## **CONCLUSION**

The proposed development reflects a kind of development that is envisaged in the Zone and is considered to have negligible adverse impacts on the adjacent residential properties, east of the subject site.

As discussed above, the boundary wall exceeds 4 metres in height, however on balance, it is considered to result in an improved visual outlook for the eastern adjacent residence.

#### RECOMMENDATION

It is recommended that the Council Assessment Panel resolve that:

- 1. Pursuant to Section 107(2)(c) of the Planning, Development and Infrastructure Act 2016, and having undertaken an assessment of the application against the Planning and Design Code, the application is NOT seriously at variance with the provisions of the Planning and Design Code; and
- 2. Development Application Number 21005547, by Jim McBryde and Sheridan Super Pty Ltd is granted Consent subject to the following conditions:

#### **CONDITIONS**

- 1. The development granted approval shall be undertaken and completed in accordance with the stamped plans and documentation, except where varied by conditions below (if any).
- 2. The stormwater disposal system shall cater for a 5 year rainfall event with discharge to the street not to exceed 10 litres per second. Any excess above this flow is to be detained on site.

#### **ADVISORY NOTES**

#### **General Notes**

- No work can commence on this development unless a Development Approval has been obtained. If one or
  more consents have been granted on this Decision Notification Form, you must not start any site works or
  building work or change of use of the land until you have received notification that Development Approval
  has been granted.
- 2. Appeal rights General rights of review and appeal exist in relation to any assessment, request, direction or act of a relevant authority in relation to the determination of this application, including conditions.
- 3. A decision of the Commission in respect of a development classified as restricted development in respect of which representations have been made under section 110 of the Act does not operate
  - a. until the time within which any person who made any such representation may appeal against a decision to grant the development authorisation has expired; or
  - b. if an appeal is commenced
    - i. until the appeal is dismissed, struck out or withdrawn; or
    - ii. until the questions raised by the appeal have been finally determined (other than any question as to costs).

### OFFICER MAKING RECOMMENDATION

Name: Dean Spasic

Title: Development Officer - Planning,

**Date:** 07/07/2021


#### 593 ANZAC HWY GLENELG NORTH SA 5045

#### Address:

Click to view a detailed interactive SAILIS in SAILIS

APPENDIX 1

To view a detailed interactive property map in SAPPA click on the map below

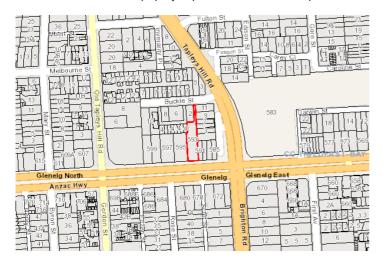

## **Property Zoning Details**

#### Overlay

Airport Building Heights (Regulated) (All structures over 44 metres)

Advertising Near Signalised Intersections

**Building Near Airfields** 

Heritage Adjacency

Hazards (Flooding General)

Prescribed Wells Area

Regulated Trees

Traffic Generating Development

#### Zone

Suburban Business

### **Development Pathways**

#### Suburban Business

#### 1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- · Brush fence
- Building work on railway land
- Carport
- Internal building work
- · Outbuilding
- Partial demolition of a building or structure
- · Private bushfire shelter
- Shade sail
- Solar photovoltaic panels (roof mounted)
- Swimming pool or spa pool
- Verandah
- Water tank (above ground)
- Water tank (underground)

#### 2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Carport
- Consulting room
- Office
- Outbuilding
- · Replacement building
- Shop
- · Temporary accommodation in an area affected by bushfire
- Verandah

#### 3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

- Advertisement
- Ancillary accommodation
- Carport
- Consulting room
- Demolition
- · Detached dwelling
- Dwelling addition
- Dwelling or residential flat building undertaken by:
  - (a) the South Australian Housing Trust either individually or jointly with other persons or bodies
  - (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.
- Fence
- Group dwelling
- Land division
- Light industry
- Office
- Outbuilding
- · Residential flat building
- Retaining wall
- Row dwelling
- · Semi-detached dwelling
- · Service trade premises
- Shop
- Store
- Tree-damaging activity
- Verandah
- Warehouse

#### 4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

# Part 2 - Zones and Sub Zones

### Suburban Business Zone

**Assessment Provisions (AP)** 

Desired Outcome			
DO 1	A business and innovation precinct that includes a range of emerging businesses which have low level off-site impacts. Residential development within the area is subordinate to employment uses and generally includes medium-density housing designed to complement and not prejudice the operation of existing businesses.		
DO 2	A zone characterised by low-rise buildings with additional height in well serviced and accessible locations.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
Land Use and Intensity			
PO 1.1	DTS/DPF 1.1		
Shops, office, consulting room, low-impact industry and other non-residential uses are supported by a variety of compact, medium density housing and	Development comprises one or more of the following:		
accommodation types.	(a) Consulting room		

Page 2 of 105 Document Set ID: 4151930

age 2 of 105 Printed on 21/04/2021

· · ·		
	(b) Dwelling (c) Institutional facility (d) Light industry (e) Motor repair station (f) Office (g) Residential flat building (h) Retail fuel outlet (i) Service trade premises (j) Shop (k) Store (l) Warehouse	
PO 1.2  Retail, business and commercial development is of a scale that provides a local convenience service without undermining the vibrancy and function of zones primarily intended to accommodate such development.	DTS/DPF 1.2  Shops, offices and consulting rooms do not exceed 500m <sup>2</sup> in gross leasable floor area.	
PO 1.3  Compact, medium density residential development does not prejudice the operation of non-residential activity within the zone.	DTS/DPF 1.3  None are applicable.	
PO 1.4	DTS/DPF 1.4	
Changes in the use of land between similar businesses encourages the efficient reuse of commercial premises and supports continued local assess to a range of services compatible to the locality.	A change of use to a shop, office or consulting room or any combination of these uses where all of the following are achieved:	
	<ul> <li>(a) the area to be occupied by the proposed development is in an existing building and is currently used as a shop, office, consulting room or any combination of these uses</li> <li>(b) if the proposed the change in use is for a shop:  (i) the total gross leasable floor area of the shop will not exceed 500m²  (ii) if primarily involving the handling and sale of foodstuffs, areas used for the storage and collection of refuse are sited at least 10m from the site of a dwelling (other than a dwelling directly associated with the proposed shop)</li> <li>(iii) if primarily involving heating and cooking of foodstuffs in a commercial kitchen and is within 30m of any residential allotment within a neighbourhood-type zone boundary or a dwelling (other than a dwelling directly associated with the proposed shop), an exhaust duct and stack (chimney) exists or is capable of being installed for discharging exhaust emissions</li> <li>(c) off-street vehicular parking exists in accordance with the rate(s) specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number, except where:  (i) the required contribution will be made into a relevant car parking offset scheme (other than where a relevant contribution has previously been made) or  (ii) the building is a local heritage place.</li> </ul>	
Built Form a	nd Character	
PO 2.1  Building scale and design complement surrounding built form, streetscapes and local character.	DTS/DPF 2.1  None are applicable.	
PO 2.2  Development with high visual and environmental amenity, particularly along arterial roads and the boundaries of adjoining zones is primarily intended to accommodate sensitive receivers.	DTS/DPF 2.2  None are applicable.	
Building heigh	t and setbacks	
PO 3.1	DTS/DPF 3.1	

Page 3 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 Buildings are generally of low-rise construction, with taller buildings positioned towards the centre of the zone and away from any adjoining neighbourhood-type zone to positively contribute to the built form character of a locality.

Building height (excluding garages, carports and outbuildings) is no greater than:

- (a) the following:
- (b) in all other cases (ie there is a blank field for both values):
  - 2 building levels or 9m where the development is located adjoining a different zone that primarily envisages residential development
  - (ii) 3 building levels or 12m in all other cases.

In relation to DTS/DPF 3.1, in instances where:


- (c) more than one value is returned in the same field:
  - (i) for the purpose of DTS/DPF 3.1(a), refer to the Maximum Building Height (Metres) Technical and Numeric Variation layer or Maximum Building Height (Levels) Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development
  - (ii) only one value is returned for DTS/DPF 3.1(a), (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other.

PO 3.2

Buildings mitigate visual impacts of building massing on residential development within a neighbourhood-type zone.

DTS/DPF 3.2

Buildings constructed within a building envelope provided by a 45 degree plane measured from a height of 3m above natural ground level at the boundary of an allotment used for residential purposes within a neighbourhood-type zone as shown in the following diagram (except where this boundary is a southern boundary, or where this boundary is the primary street boundary)

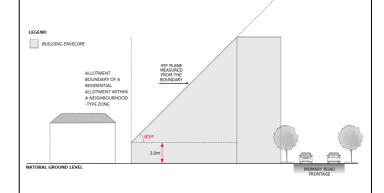


PO 3.3

Buildings mitigate overshadowing of residential development within a neighbourhood-type zone.

DTS/DPF 3.3

Buildings on sites with a southern boundary adjoining an allotment used for residential purposes within a neighbourhood-type zone are constructed within a building envelope provided by a 30 degree plane grading north measured from a height of 3m above natural ground level at the southern boundary, as shown in the following diagram

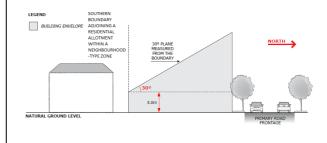

Page 4 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
PO 3.4	DTS/DPF 3.4
Buildings are set back from primary street boundaries to contribute to a consistent streetscape.	The building line of a building is set back from the primary street frontage:  (a) the average of any existing buildings on either of the adjoining sites
	having frontage to the same street or
	(b) not less than 6m where no building exists on an adjoining site.
PO 3.5	DTS/DPF 3.5
Buildings are set back from secondary street boundaries (other than rear	Building walls are set back from the secondary street frontage:
laneways) to contribute to a consistent streetscape.	(a) the average of any existing buildings on adjoining sites having frontage to the same street or
	(b) not less than 900mm where no building exists on an adjoining site.
PO 3.6	DTS/DPF 3.6
Buildings are set back from side boundaries to maintain adequate separation and ventilation.	Other than walls located on a side boundary, building walls are set back at least 900mm from side boundaries.
PO 3.7	DTS/DPF 3.7
Buildings are set back from rear boundaries to minimise adverse impacts on adjoining land uses.	Building walls are set back from the rear boundary at least 3m.
PO 3.8	DTS/DPF 3.8
Buildings on an allotment fronting a road that is not a State maintained road, and where land on the opposite side of the road is within a neighbourhood-type zone, provides an orderly transition to the built form scale envisaged in the adjacent zone to complement the streetscape character.	None are applicable.
Land	Division
PO 4.1	DTS/DPF 4.1
Land division and / or site amalgamation create allotments that vary in size and are suitable for a variety of residential and commercial activities and improve the level of development integration.	None are applicable.
Adverti	I sements
PO 5.1	DTS/DPF 5.1
Freestanding advertisements identify the associated business without creating a visually dominant element within the streetscape.	Freestanding advertisements:
	(a) do not exceed 6m in height
	(b) do not have a sign face that exceeds 4m <sup>2</sup> per side
Conce	pt Plans
PO 6.1	DTS/DPF 6.1
Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code	The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant:
to support the orderly development of land through staging of development and provision of infrastructure.	In relation to DTS/DPF 6.1, in instances where:
	<ul> <li>(a) one or more Concept Plan is returned, refer to Part 12 - Concept Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant.</li> </ul>
	(b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 6.1 is met.
Ancillary Buildin	gs and Structures
PO 7.1	DTS/DPF 7.1
Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or	Ancillary buildings and structures:
neighbouring properties.	(a) are ancillary to a dwelling erected on the same site
	(b) have a floor area not exceeding 60m <sup>2</sup>
	(c) are not constructed, added to or altered so that any part is situated  (i) in front of any part of the building line of the dwelling to which it

Policy24 - Enquiry is ancillary (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) in the case of a garage or carport, the garage or carport: is set back at least 5.5m from the boundary of the primary street (ii) when facing a primary street or secondary street, has a total door / opening not exceeding: for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent f situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure (h) have a wall height or post height not exceeding 3m above natural (i) have a roof height where no part of the roof is more than 5m above the natural ground level (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: a total area as determined by the following table: Dwelling site area (or in the case of Minimum residential flat building or group percentage of site dwelling(s), average site area) (m<sup>2</sup>) <150 10% 150-200 15% 201-450 20% >450 25% (ii) the amount of existing soft landscaping prior to the development DTS/DPF 7.2 PO 7.2 Ancillary buildings and structures do not impede on-site functional requirements Ancillary buildings and structures do not result in: such as private open space provision, car parking requirements or result in overless private open space than specified in Design in Urban Areas Table development of the site. 1 - Private Open Space less on-site car parking than specified in Transport, Access and (b)

#### Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the Planning, Development and Infrastructure Act 2016, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

#### Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class	of Development	Exceptions	
(Column A)		(Column B)	
<ol> <li>A kind of development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development.</li> </ol>		None specified.	
2.	Any kind of development where the site of the development is <b>not</b> adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone.	Except any of the following:     1. the demolition of a State or Local Heritage Place     2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.	
3.	Any development involving any of the following (or of any combination of any of the following):  (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) ancillary accommodation (d) building work on railway land (e) carport (f) community facility (g) dwelling (h) fence (i) outbuilding (j) private bushfire shelter (k) residential flat building (l) shade sail (m) solar photovoltaic panels (roof mounted) (n) student accommodation (o) swimming pool or spa pool (p) verandah (q) water tank.	Except development that exceeds the maximum building height specified in Suburban Business Zone DTS/DPF 3.1 or does not satisfy any of the following:  1. Suburban Business Zone DTS/DPF 3.2 2. Suburban Business Zone DTS/DPF 3.3.	
4.	Any development involving any of the following (or of any combination of any of the following):  (a) consulting room  (b) office  (c) shop.	Except development that exceeds the maximum building height specified in Suburban Business Zone DTS/DPF 3.1 or does not satisfy any of the following 1. Suburban Business Zone DTS/DPF 1.2 2. Suburban Business Zone DTS/DPF 3.2 3. Suburban Business Zone DTS/DPF 3.3.	
5.	Any development involving any of the following (or of any combination of any of the following):  (a) internal building works (b) land division (c) replacement building (d) temporary accommodation in an area affected by bushfire. (e) tree damaging activity.	None specified.	
6.	Demolition.	Except any of the following:  1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.	

Placement of Notices - Exemptions for Performance Assessed Development

Page 7 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

# Part 3 - Overlays

## **Advertising Near Signalised Intersections Overlay**

### **Assessment Provisions (AP)**

Desired Outcome		
DO 1	Provision of a safe road environment by reducing driver distraction at key points of conflict on the road.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Advertisements Near	Signalised Intersections
PO 1.1  Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 1.1  Advertising:  (a) is not illuminated  (b) does not incorporate a moving or changing display or message  (c) does not incorporate a flashing light(s).

### Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Advertisement or advertising hoarding that:  (a) is within 100m of a:  (i) signalised intersection or  (ii) signalised pedestrian crossing and  (b) will:  (i) be internally illuminated or  (ii) incorporate a moving or changing display or message or  (iii) incorporate a flashing light.	Commissioner of Highways.	To provide expert technical assessment on potential risks relating to pedestrian and road safety which may arise from advertisements near intersections.	Development of a class to which Schedule 9 clause 3 item 21 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

# Airport Building Heights (Regulated) Overlay

Page 8 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

### **Assessment Provisions (AP)**

Desired Outcome		
Management of potential impacts of buildings and generated emissions to maintain operational and safety requirements of registered and certified commercial and military airfields, airports, airstrips and helicopter landing sites.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operation of a certified or registered aerodrome.	Buildings are located outside the area identified as 'All structures' (no height limit is prescribed) and do not exceed the height specified in the Airport Building Heights (Regulated) Overlay which applies to the subject site as shown on the SA Property and Planning Atlas.  In instances where more than one value applies to the site, the lowest value relevant to the site of the proposed development is applicable.
PO 1.2	DTS/DPF 1.2
Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with a certified or registered aerodrome.	Development does not include exhaust stacks.

## Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
(a) building located in an area identified as 'All structures' (no height limit is prescribed) or will exceed the height specified in the Airport Building Heights (Regulated) Overlay  (b) building comprising or beyond strated that generates	The airport-operator company for the relevant airport within the meaning of the <i>Airports Act</i> 1996 of the Commonwealth or, if there is no airport-operator company, the Secretary of the Minister responsible for the administration of the <i>Airports Act</i> 1996 of the Commonwealth.	To provide expert assessment and direction to the relevant authority on potential impacts on the safety and operation of aviation activities.	Development of a class to which Schedule 9 clause 3 item 1 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

# **Building Near Airfields Overlay**

### **Assessment Provisions (AP)**

Desired Outcome	
DO 1	Maintain the operational and safety requirements of certified commercial and military airfields, airports, airstrips and helicopter landing sites through management of non-residential lighting, turbulence and activities that may attract or result in the congregation of wildlife.

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature

Page 9 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

- Silver Linquity			
PO 1.1	DTS/DPF 1.1		
Outdoor lighting associated with a non-residential use does not pose a hazard to commercial or military aircraft operations.	Development:  (a) primarily or wholly for residential purposes (b) for non-residential purposes that does not incorporate outdoor floodlighting.		
PO 1.2  Development likely to attract or result in the congregation of wildlife is adequately separated from airfields to minimise the potential for aircraft wildlife strike.	All development except where it comprises one or more of the following located not less than 3km from the boundaries of an airport used by commercial or military aircraft:  (a) food packing/processing plant (b) horticulture (c) intensive animal husbandry (d) showground (e) waste management facility (f) waste transfer station (g) wetland (h) wildlife sanctuary.		
PO 1.3  Buildings are adequately separated from runways and other take-off and landing facilities within certified or registered aerodromes to minimise the potential for building-generated turbulence and windshear that may pose a safety hazard to aircraft flight movement.	DTS/DPF 1.3  The distance from any part of a runway centreline to the closest point of the building is not less than 35 times the building height.		

#### Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	_	Statutory Reference
None	None	None	None

# Hazards (Flooding - General) Overlay

## **Assessment Provisions (AP)**

Desired Outcome		
DO 1	Impacts on people, property, infrastructure and the environment from general flood risk are minimised through the appropriate siting and design of development.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Flood R	esilience
PO 2.1	DTS/DPF 2.1
Development is sited, designed and constructed to prevent the entry of floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished ground and floor level not less than:  In instances where no finished floor level value is specified, a building incorporates a finished floor level at least 300mm above the height of a 1% AEP

Page 10 of 105
Document Set ID: 4151930

Printed on 21/04/2021

Version: 1, Version Date: 19/07/2021

	flood event.
Environmental Protection	
PO 3.1	DTS/DPF 3.1
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.

#### Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	-	Statutory Reference
None	None	None	None

## **Heritage Adjacency Overlay**

## **Assessment Provisions (AP)**

Desired Outcome	
DO 1	Development adjacent to State and Local Heritage Places maintains the heritage and cultural values of those Places.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Development adjacent to a State or Local Heritage Place does not dominate, encroach on or unduly impact on the setting of the Place.	None are applicable.
Land	Division
PO 2.1	DTS/DPF 2.1
Land division adjacent to a State or Local Heritage Place creates allotments that are of a size and dimension that enables the siting and setbacks of new buildings from allotment boundaries so that they do not dominate, encroach or unduly impact on the setting of the Place.	None are applicable.

### Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
Development that may materially affect the context of a State Heritage Place.	Minister responsible for the administration of the <i>Heritage Places Act</i> 1993.	To provide expert assessment and direction to the relevant authority on the potential impacts of development	Development of a class to which

adjacent State Heritage Places.	Schedule 9
	clause 3 item
	17 of the
	Planning,
	Development
	and
	Infrastructure
	(General)
	Regulations
	2017 applies.

## **Prescribed Wells Area Overlay**

### **Assessment Provisions (AP)**

	Desired Outcome	
DO 1	Sustainable water use in prescribed wells areas.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
All development, but in particular involving any of the following:  (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry  has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.	(a) the applicant has a current water licence in which sufficient spare capacity exists to accommodate the water needs of the proposed use or     (b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.

## Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the <i>Landscape South Australia Act 2019:</i> (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry.  Commercial forestry that requires a forest water licence under Part 8 Division 6 of the <i>Landscape South Australia Act 2019</i> .	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

## **Regulated and Significant Tree Overlay**

Page 12 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

# **Assessment Provisions (AP)**

	Desired Outcome		
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.		

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

	Performance Outcome	Deemed-to-Satisfy Criteria /
		Designated Performance Feature
DO 4.4	Tree Reten	ion and Health
PO 1.1		DTS/DPF 1.1
Regulated trees	s are retained where they:	None are applicable.
(b) are inc and W and / c	an important visual contribution to local character and amenity digenous to the local area and listed under the <i>National Parks</i> vildlife Act 1972 as a rare or endangered native species or e an important habitat for native fauna.	
PO 1.2		DTS/DPF 1.2
Significant trees	s are retained where they:	None are applicable.
area (b) are inc Parks (c) repres (d) are pa (e) are im enviror and / c		
PO 1.3		DTS/DPF 1.3
	g activity not in connection with other development satisfies (a)	None are applicable.
(a) tree da	amaging activity is only undertaken to:	
(i)	remove a diseased tree where its life expectancy is short	
(ii)	mitigate an unacceptable risk to public or private safety due to limb drop or the like	
(iii)	rectify or prevent extensive damage to a building of value as comprising any of the following:  A. a Local Heritage Place B. a State Heritage Place C. a substantial building of value	
(iv)	and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire	
(v)	treat disease or otherwise in the general interests of the health of the tree and / or	
(vi)	maintain the aesthetic appearance and structural integrity of the tree	
	tion to a significant tree, tree-damaging activity is avoided unless sonable remedial treatments and measures have been determined	

Page 13 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

## Policy24 - Enquiry

to be ineffective.		
PO 1.4	DTS/DPF 1.4	
A tree-damaging activity in connection with other development satisfies all the following:	None are applicable.	
<ul> <li>it accommodates the reasonable development of land in accordance with the relevant zone or subzone where such development might not otherwise be possible</li> </ul>		
(b) in the case of a significant tree, all reasonable development options and design solutions have been considered to prevent substantial tree- damaging activity occurring.		
Ground work	affecting trees	
PO 2.1	DTS/DPF 2.1	
Regulated and significant trees, including their root systems, are not unduly compromised by excavation and / or filling of land, or the sealing of surfaces within the vicinity of the tree to support their retention and health.	None are applicable.	
Land Division		
PO 3.1	DTS/DPF 3.1	
Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.	Land division where:  (a) there are no regulated or significant trees located within or adjacent to the plan of division or  (b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.	

## Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

# **Traffic Generating Development Overlay**

## **Assessment Provisions (AP)**

	Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.		
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.		

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
	Traffic Generating Development		
Ī	PO 1.1	DTS/DPF 1.1	

Page 14 of 105
Document Set ID: 4151930

Printed on 21/04/2021

Version: 1, Version Date: 19/07/2021

Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:		
	(a) land division creating 50 or more additional allotments     (b) commercial development with a gross floor area of 10,000m2 or more     (c) retail development with a gross floor area of 2,000m2 or more     (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more		
	(e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.		
PO 1.2	DTS/DPF 1.2		
Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:		
	<ul> <li>(a) land division creating 50 or more additional allotments</li> <li>(b) commercial development with a gross floor area of 10,000m2 or more</li> <li>(c) retail development with a gross floor area of 2,000m2 or more</li> <li>(d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more</li> <li>(e) industry with a gross floor area of 20,000m2 or more</li> <li>(f) educational facilities with a capacity of 250 students or more.</li> </ul>		
PO 1.3	DTS/DPF 1.3		
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development:		
	<ul> <li>(a) land division creating 50 or more additional allotments</li> <li>(b) commercial development with a gross floor area of 10,000m2 or more</li> <li>(c) retail development with a gross floor area of 2,000m2 or more</li> <li>(d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more</li> <li>(e) industry with a gross floor area of 20,000m2 or more</li> <li>(f) educational facilities with a capacity of 250 students or more.</li> </ul>		

## Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
(a) (b) (c) (d) (e) (f) (f)	where all of the relevant deemed-to-satisfy criteria are met, e following classes of development that are proposed within a State Maintained Road:  land division creating 50 or more additional allotments commercial development with a gross floor area of 10,000m² or more  retail development with a gross floor area of 2,000m² or more a warehouse or transport depot with a gross leasable floor area of 8,000m² or more industry with a gross floor area of 20,000m² or more educational facilities with a capacity of 250 students or more.	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

# Part 4 - General Development Policies

### **Advertisements**

Page 15 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## **Assessment Provisions (AP)**

# **Desired Outcome** DO 1 Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Api	pearance
PO 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following:
	(a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall:  (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level:  A. do not have any part rising above parapet height  B. are not attached to the roof of the building
	(c) where they are not flush with a wall:  (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure
	(ii) if attached to a two-storey building:  A. has no part located above the finished floor level of
	the second storey of the building  B. does not protrude beyond the outer limits of any verandah structure below
	C. does not have a sign face that exceeds 1m2 per side
	(d) if located below canopy level, are flush with a wall  (e) if located at canopy level, are in the form of a fascia sign  (f) if located above a canopy:  (i) are flush with a wall  (ii) do not have any part rising above parapet height  (iii) are not attached to the roof of the building.  (g) if attached to a verandah, no part of the advertisement protrudes
	beyond the outer limits of the verandah structure  (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building
	(i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which the are attached.
PO 1.2	DTS/DPF 1.2
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is:
	(a) concealed by the associated advertisement and decorative detailing or     (b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.
DO 44	support structure in the form of a single or dual post design.
PO 1.3	DTS/DPF 1.3

Page 16 of 105 Document Set ID: 4151930

Policy24 - Enquiry	
allotment.	of the site.
PO 1.4	DTS/DPF 1.4
Where possible, advertisements on public land are integrated with existing structures and infrastructure.	Advertisements on public land that meet at least one of the following:  (a) achieves Advertisements DTS/DPF 1.1  (b) are integrated with a bus shelter.
PO 1.5	DTS/DPF 1.5
Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.
Proliferation of	Advertisements
PO 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
PO 2.3	DTS/DPF 2.3
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:
	<ul> <li>(a) are attached to a building</li> <li>(b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached</li> </ul>
	(c) do not result in more than one sign per occupancy that is not flush with a wall.
Advertisin	ng Content
PO 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they are located on to assist is the ready identification of the activity or activities on the land and avoids unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amenity Impacts	
PO 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
Safety	
PO 5.1	DTS/DPF 5.1
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	
PO 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
PO 5.3	DTS/DPF 5.3
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following:
(a) being liable to interpretation by drivers as an official traffic sign or signal	(a) are not located in a public road or rail reserve     (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram

Page 17 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
(b) obscuring or impairing drivers' view of official traffic signs or signals     obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings.	Corner Cut-Off Area    4.5M   Road Reserve
PO 5.4	DTS/DPF 5.4
Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	DTS/DPF 5.5  Where the advertisement or advertising hoarding is:  (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb  (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal  (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal:  (a) 110 km/h road - 14m  (b) 100 km/h road - 13m  (c) 90 km/h road - 10m  (d) 70 or 80 km/h road - 8.5m.
PO 5.6  Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

# **Animal Keeping and Horse Keeping**

## **Assessment Provisions (AP)**

Desired Outcome	
	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting and Design	
PO 1.1	DTS/DPF 1.1
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2

Page 18 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.
Horse Keeping	
PO 2.1	DTS/DPF 2.1
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	None are applicable.
PO 2.2	DTS/DPF 2.2
Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	Stables, horse shelters and associated yards are sited in accordance with all of the following:  (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership  (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.
PO 2.3	DTS/DPF 2.3
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.
PO 2.4	DTS/DPF 2.4
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.
PO 2.5	DTS/DPF 2.5
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).
Ker	nnels
PO 3.1	DTS/DPF 3.1
Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	The floors of kennels satisfy all of the following:  (a) are constructed of impervious concrete  (b) are designed to be self-draining when washed down.
PO 3.2	DTS/DPF 3.2
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.
<ul><li>(a) adopting appropriate separation distances</li><li>(b) orientating openings away from sensitive receivers.</li></ul>	
PO 3.3	DTS/DPF 3.3
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.
Wa	stes
PO 4.1	DTS/DPF 4.1
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

# Aquaculture

Printed on 21/04/2021

Page 19 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## **Assessment Provisions (AP)**

# **Desired Outcome** DO 1 Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land-based Aquaculture	
PO 1.1	DTS/DPF 1.1
Land-based aquaculture and associated components are sited and designed to mitigate adverse impacts on nearby sensitive receivers.	Land-based aquaculture and associated components are located to satisfy all of the following:  (a) 200m or more from a sensitive receiver in other ownership  (b) 500m or more from the boundary of a zone primarily intended to
	<ul> <li>(b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers.</li> </ul>
PO 1.2	DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
PO 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.
PO 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	None are applicable.
PO 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.
Marine Based Aquaculture	
PO 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including:	None are applicable.
<ul> <li>(a) creeks and estuaries</li> <li>(b) wetlands</li> <li>(c) significant seagrass and mangrove communities</li> <li>(d) marine habitats and ecosystems.</li> </ul>	
PO 2.2	DTS/DPF 2.2

Policy24 - Enquiry	
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
PO 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate	Marine aquaculture development is located 100m or more seaward of the high
distance seaward of the high water mark.	water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
<ul> <li>(a) areas of high public use</li> <li>(b) areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports</li> <li>(c) areas of outstanding visual or environmental value</li> <li>(d) areas of high tourism value</li> <li>(e) areas of important regional or state economic activity, including commercial ports, wharfs and jetties</li> <li>(f) the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.</li> </ul>	
PO 2.6	DTC/DDE 2.6
	DTS/DPF 2.6
Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.	None are applicable.
PO 2.7	DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating measures such as:	None are applicable.
<ul> <li>(a) using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water</li> <li>(b) positioning structures to protrude the minimum distance practicable</li> </ul>	
above the surface of the water	
(c) avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons	
(d) positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8	DTS/DPF 2.8
Access, launching and maintenance facilities utilise existing established roads, tracks, ramps and paths to or from the sea where possible to minimise environmental and amenity impacts.	None are applicable.
PO 2.9	DTS/DPF 2.9
Access, launching and maintenance facilities are developed as common user facilities and are co-located where practicable to mitigate adverse impacts on coastal areas.	None are applicable.
PO 2.10	DTS/DPF 2.10
Marine aquaculture is sited to minimise potential impacts on, and to protect the integrity of, reserves under the <i>National Parks and Wildlife Act 1972</i> .	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .
PO 2.11	DTS/DPF 2.11
Onshore storage, cooling and processing facilities do not impair the coastline and its visual amenity by:	None are applicable.
(a) being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal	

Page 21 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## Policy24 - Enquiry

ss s
tion and Safety
DTS/DPF 3.1
None are applicable.
DTS/DPF 3.2
None are applicable.
ental Management
DTS/DPF 4.1
None are applicable.
DTS/DPF 4.2
None are applicable.
DTS/DPF 4.3
None are applicable.
DTS/DPF 4.4
None are applicable.
t:

# **Beverage Production in Rural Areas**

## **Assessment Provisions (AP)**

Desired Outcome		
DO 1	Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Odour and Noise	
PO 1.1	DTS/DPF 1.1
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.
PO 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts	None are applicable.

Page 22 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

DTS/DPF 1.3
None are applicable.
DTS/DPF 1.4
Brew kettles are fitted with a vapour condenser.
DTS/DPF 1.5
Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Quality
DTS/DPF 2.1
Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
DTS/DPF 2.2
None are applicable.
DTS/DPF 2.3
None are applicable.
DTS/DPF 2.4
None are applicable.
ter Irrigation
DTS/DPF 3.1
None are applicable.
DTS/DPF 3.2
Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.
DTS/DPF 3.3
None are applicable.

# **Bulk Handling and Storage Facilities**

## **Assessment Provisions (AP)**

Page 23 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

# **Desired Outcome** DO 1 Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting a	and Design
PO 1.1	DTS/DPF 1.1
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers:  (a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility (b) bulk handling of agricultural crop products, rock, ores, minerals,
	petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility  (c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more  (d) coal handling with:  a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more  b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.
Buffers an	d Landscaping
PO 2.1	DTS/DPF 2.1
Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	None are applicable.
PO 2.2	DTS/DPF 2.2
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.
Access	and Parking
PO 3.1	DTS/DPF 3.1
Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	Roadways and vehicle parking areas are sealed with an all-weather surface.
Slipways, Wha	rves and Pontoons
PO 4.1	DTS/DPF 4.1
Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	None are applicable.

## **Clearance from Overhead Powerlines**

Printed on 21/04/2021 Version: 1, Version Date: 19/07/2021

# **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria /	
	Designated Performance Feature	
PO 1.1	DTS/DPF 1.1	
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied:              a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act 1996</i> (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.	

# Design

## **Assessment Provisions (AP)**

Desired Outcome			
DO 1	Develo	pment is:	
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area	
	(b)	durable - fit for purpose, adaptable and long lasting	
(c) inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security ar safety both internally and within the public realm, for occupants and visitors			
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
All development		
External Appearance		
PO 1.1	DTS/DPF 1.1	
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.	

Page 25 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment is integrated into Development does not incorporate any structures that protrude beyond the the building design to minimise visibility from the public realm and negative roofline. impacts on residential amenity by: positioning plant and equipment in unobtrusive locations viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land PO 1.5 DTS/DPF 1.5 The negative visual impact of outdoor storage, waste management, loading and None are applicable. service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone. Safety DTS/DPF 2.1 PO 2.1 Development maximises opportunities for passive surveillance of the public realm None are applicable. by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 DTS/DPF 2.2 Development is designed to differentiate public, communal and private areas. None are applicable. PO 2.3 DTS/DPF 2.3 Buildings are designed with safe, perceptible and direct access from public None are applicable. street frontages and vehicle parking areas. PO 2.4 DTS/DPF 2.4 Development at street level is designed to maximise opportunities for passive None are applicable. surveillance of the adjacent public realm. PO 2.5 DTS/DPF 2.5 Common areas and entry points of buildings (such as the foyer areas of None are applicable residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night. Landscaping PO 3.1 DTS/DPF 3.1 Soft landscaping and tree planting is incorporated to: None are applicable. (a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity. PO 3.2 DTS/DPF 3.2 Soft landscaping and tree planting maximises the use of locally indigenous plant None are applicable. species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species **Environmental Performance** PO 4.1 DTS/DPF 4.1 Buildings are sited, oriented and designed to maximise natural sunlight access None are applicable. and ventilation to main activity areas, habitable rooms, common areas and open spaces PO 4.2 DTS/DPF 4.2

Page 26 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## Policy24 - Enquiry

1 Oiley24 - Eriquii y		
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.	
PO 4.3	DTS/DPF 4.3	
Buildings incorporate climate-responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.	
Water Sen	sitive Design	
PO 5.1	DTS/DPF 5.1	
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.	
the quantity and quality of surface water and groundwater     the depth and directional flow of surface water and groundwater     the quality and function of natural springs.		
On-site Waste T	reatment Systems	
PO 6.1	DTS/DPF 6.1	
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space,	Effluent disposal drainage areas do not:	
driveways or car parking.	encroach within an area used as private open space or result in less private open space than that specified in Design Table 1 - Private Open Space     (b) use an area also used as a driveway	
	(c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.	
Carparking	Appearance	
Carparking PO 7.1	Appearance DTS/DPF 7.1	
PO 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through	DTS/DPF 7.1	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	DTS/DPF 7.1  None are applicable.	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	DTS/DPF 7.1  None are applicable.	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.  Po 7.3  Safe, legible, direct and accessible pedestrian connections are provided	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.  DTS/DPF 7.3	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  PO 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.  PO 7.3  Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.  DTS/DPF 7.3  None are applicable.	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.  Po 7.3  Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.  Po 7.4  Street level vehicle parking areas incorporate tree planting to provide shade and	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.  DTS/DPF 7.3  None are applicable.  DTS/DPF 7.4	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.  Po 7.3  Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.  Po 7.4  Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.  DTS/DPF 7.3  None are applicable.  DTS/DPF 7.4  None are applicable.	
Po 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:  (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.  Po 7.2  Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.  Po 7.3  Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.  Po 7.4  Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.  Po 7.5  Street level parking areas incorporate soft landscaping to improve visual	DTS/DPF 7.1  None are applicable.  DTS/DPF 7.2  None are applicable.  DTS/DPF 7.3  None are applicable.  DTS/DPF 7.4  None are applicable.  DTS/DPF 7.5	

Page 27 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry			
shade and positively contribute to amenity.			
PO 7.7	DTS/DPF 7.7		
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.		
Earthworks a	nd sloping land		
PO 8.1	DTS/DPF 8.1		
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following:		
	(a) excavation exceeding a vertical height of 1m		
	(b) filling exceeding a vertical height of 1m		
	(c) a total combined excavation and filling vertical height of 2m or more.		
PO 8.2	DTS/DPF 8.2		
Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):		
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway		
	(b) are constructed with an all-weather trafficable surface.		
PO 8.3	DTS/DPF 8.3		
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.		
do not contribute to the instability of embankments and cuttings     provide level transition areas for the safe movement of people and goods to and from the development			
(c) are designed to integrate with the natural topography of the land.			
PO 8.4	DTS/DPF 8.4		
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	None are applicable.		
PO 8.5	DTS/DPF 8.5		
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.		
Fences	and Walls		
PO 9.1	DTS/DPF 9.1		
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.		
PO 9.2	DTS/DPF 9.2		
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.		
Overlooking / Visual Privacy	(in building 3 storeys or less)		
PO 10.1	DTS/DPF 10.1		
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with a residential allotment/site satisfy one of the following:		
	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm		
	(b) have sill heights greater than or equal to 1.5m above finished floor level		
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent		

Page 28 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
	to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied:  (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or  (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:  (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwellin on adjacent land  or  (ii) 1.7m above finished floor level in all other cases
All Residenti	al development
Front elevations an	d passive surveillance
PO 11.1	DTS/DPF 11.1
Dwellings incorporate windows along primary street frontages to encourage	Each dwelling with a frontage to a public street:
passive surveillance and make a positive contribution to the streetscape.	<ul> <li>(a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m</li> <li>(b) has an aggregate window area of at least 2m² facing the primary stree</li> </ul>
PO 11.2	DTS/DPF 11.2
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.
Outlook a	and amenity
PO 12.1	DTS/DPF 12.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an outlook towards the street frontage or private open space, public open space, or waterfront areas.
PO 12.2	DTS/DPF 12.2
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.
Ancillary [	Development
PO 13.1	DTS/DPF 13.1
Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.	Ancillary buildings:  (a) are ancillary to a dwelling erected on the same site  (b) have a floor area not exceeding 60m2  (c) are not constructed, added to or altered so that any part is situated:  (i) in front of any part of the building line of the dwelling to which is ancillary  or  (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)  (d) in the case of a garage or carport, the garage or carport:  (i) is set back at least 5.5m from the boundary of the primary street  (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:  A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser  B. for dwellings comprising two or more building levels a the building line fronting the same public street - 7m in width

Page 29 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

- if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
  - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary
  - the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- have a wall height or post height not exceeding 3m above natural ground level
- have a roof height where no part of the roof is more than 5m above the natural ground level
- (i) if clad in sheet metal, is pre-colour treated or painted in a non-reflective
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
  - a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m <sup>2</sup> )	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

the amount of existing soft landscaping prior to the development occurring.

PO 13.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision or car parking requirements and do not result in over-development of the site.

**DTS/DPF 13.2** 

Ancillary buildings and structures do not result in:

- less private open space than specified in Design in Urban Areas Table 1 - Private Open Space
- (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

PO 13.3

Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.

DTS/DPF 13.3

The pump and/or filtration system is ancillary to a dwelling erected on the same site and is:

- (a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment
- (b) located at least 12m from the nearest habitable room located on an adjoining allotment.

Garage appearance

PO 14.1

Garaging is designed to not detract from the streetscape or appearance of a dwelling.

DTS/DPF 14.1

Garages and carports facing a street:

- are situated so that no part of the garage or carport is in front of any part of the building line of the dwelling
- are set back at least 5.5m from the boundary of the primary street
- (c) have a garage door / opening not exceeding 7m in width

have a garage door /opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street. Massing DTS/DPF 15.1 PO 15.1 The visual mass of larger buildings is reduced when viewed from adjoining None are applicable allotments or public streets. Dwelling additions PO 16.1 DTS / DPF 16.1 Dwelling additions are sited and designed to not detract from the streetscape or Dwelling additions: amenity of adjoining properties and do not impede on-site functional are not constructed, added to or altered so that any part is situated requirements closer to a public street do not result in: (i) excavation exceeding a vertical height of 1m (ii) filling exceeding a vertical height of 1m (iii) a total combined excavation and filling vertical height of 2m or (iv) less Private Open Space than specified in Design Table 1 -Private Open Space less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas (vi) upper level windows facing side or rear boundaries unless: they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm have sill heights greater than or equal to 1.5m above finished floor level C. incorporate screening to a height of 1.5m above finished floor level all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land 1.7m above finished floor level in all other cases. Private Open Space PO 17 1 **DTS/DPF 17 1** Dwellings are provided with suitable sized areas of usable private open space to Private open space is provided in accordance with Design Table 1 - Private meet the needs of occupants. Open Space Water Sensitive Design PO 18.1 DTS/DPF 18.1 Residential development creating a common driveway / access includes Residential development creating a common driveway / access that services 5 or stormwater management systems that minimise the discharge of sediment, more dwellings achieves the following stormwater runoff outcomes: suspended solids, organic matter, nutrients, bacteria, litter and other 80 per cent reduction in average annual total suspended solids (a) contaminants to the stormwater system, watercourses or other water bodies. (b) 60 per cent reduction in average annual total phosphorus (c) 45 per cent reduction in average annual total nitrogen. PO 18.2 **DTS/DPF 18.2** Development creating a common driveway / access that services 5 or more Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the dwellings: rate and duration of stormwater discharges from the site to ensure that the maintains the pre-development peak flow rate from the site based upon development does not increase the peak flows in downstream systems.

Page 31 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings. Car parking, access and manoeuvrability PO 19 1 DTS/DPF 19 1 Enclosed parking spaces are of a size and dimensions to be functional, Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area): accessible and convenient. single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m double width car parking spaces (side by side): a minimum length of 5.4m (ii) a minimum width of 5.4m minimum garage door width of 2.4m per space. PO 19.2 DTS/DPF 19.2 Uncovered parking spaces are of a size and dimensions to be functional, Uncovered car parking spaces have: accessible and convenient. (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m PO 19.3 DTS/DPF 19.3 Driveways are located and designed to facilitate safe access and egress while Driveways and access points on sites with a frontage to a public road of 10m or maximising land available for street tree planting, landscaped street frontages, less have a width between 3.0 and 3.2 metres measured at the property domestic waste collection and on-street parking. boundary and are the only access point provided on the site. PO 19.4 DTS/DPF 19.4 Vehicle access is safe, convenient, minimises interruption to the operation of Vehicle access to designated car parking spaces satisfy (a) or (b): public roads and does not interfere with street infrastructure or street trees. is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land where newly proposed: is set back 6m or more from the tangent point of an intersection of 2 or more roads is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services PO 19.5 DTS/DPF 19.5 Driveways are designed to enable safe and convenient vehicle movements from Driveways are designed and sited so that: the public road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site

Page 32 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

### PO 19.6 DTS/DPF 19.6 Driveways and access points are designed and distributed to optimise the Where on-street parking is available abutting the site's street frontage, on-street provision of on-street visitor parking. parking is retained in accordance with the following requirements: minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 20.1 **DTS/DPF 20.1** Provision is made for the adequate and convenient storage of waste bins in a None are applicable. location screened from public view. Design of Transportable Dwellings PO 21.1 DTS/DPF 21.1 The sub-floor space beneath transportable buildings is enclosed to give the Buildings satisfy (a) or (b): appearance of a permanent structure. (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Group dwelling, residential flat buildings and battle-axe development Amenity PO 22.1 DTS/DPF 22.1 Dwellings are of a suitable size to accommodate a layout that is well organised Dwellings have a minimum internal floor area in accordance with the following and provides a high standard of amenity for occupants. Number of bedrooms Minimum internal floor area Studio 35m<sup>2</sup> 1 bedroom 50m<sup>2</sup> 2 bedroom 65m<sup>2</sup> 3+ bedrooms 80m<sup>2</sup> and any dwelling over 3 bedrooms provides an additional $15 \mathrm{m}^2$ for every additional bedroom PO 22.2 DTS/DPF 22.2 The orientation and siting of buildings minimises impacts on the amenity, outlook None are applicable. and privacy of occupants and neighbours. PO 22.3 DTS/DPF 22.3 Development maximises the number of dwellings that face public open space and None are applicable. public streets and limits dwellings oriented towards adjoining properties. PO 22.4 DTS/DPF 22.4 Battle-axe development is appropriately sited and designed to respond to the Dwelling sites/allotments are not in the form of a battle-axe arrangement. existing neighbourhood context. Communal Open Space PO 23.1 **DTS/DPF 23.1**

Page 33 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## Policy24 - Enquiry

Policy24 - Enquiry			
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.		
PO 23.2	DTS/DPF 23.2		
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.		
PO 23.3	DTS/DPF 23.3		
Communal open space is designed and sited to:	None are applicable.		
<ul><li>(a) be conveniently accessed by the dwellings which it services</li><li>(b) have regard to acoustic, safety, security and wind effects.</li></ul>			
PO 23.4	DTS/DPF 23.4		
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.		
PO 23.5	DTS/DPF 23.5		
Communal open space is designed and sited to:	None are applicable.		
<ul> <li>(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings</li> <li>(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.</li> </ul>			
TOUTTS to facilitate passive surveillance.			
Carparking, access	and manoeuvrability		
PO 24.1	DTS/DPF 24.1		
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:  (a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number)  (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly		
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.		
PO 24.2	DTS/DPF 24.2		
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.		
PO 24.3	DTS/DPF 24.3		
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:  (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings:  (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street  (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.		
PO 24.4	DTS/DPF 24.4		
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.		

Printed on 21/04/2021

Page 34 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry		
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.	
PO 24.6	DTS/DPF 24.6	
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.	
Soft Lar	dscaping	
PO 25.1	DTS/DPF 25.1	
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.	
PO 25.2	DTS/DPF 25.2	
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Site Facilities	Waste Storage	
PO 26.1	DTS/DPF 26.1	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 26.2	DTS/DPF 26.2	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 26.3	DTS/DPF 26.3	
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.	
located away, or screened, from public view, and     conveniently located in proximity to dwellings and the waste collection point.		
PO 26.4	DTS/DPF 26.4	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 26.5	DTS/DPF 26.5	
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.	
PO 26.6	DTS/DPF 26.6	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
Supported accommodation	on and retirement facilities	
Siting and 0	Configuration	
PO 27.1	DTS/DPF 27.1	
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.	
Movement and Access		
PO 28.1	DTS/DPF 28.1	
Development is designed to support safe and convenient access and movement	None are applicable.	

Page 35 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 for residents by providing: ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places car parks with gradients no steeper than 1-in-40 and of sufficient area (c) to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal Open Space PO 29.1 DTS/DPF 29.1 Development is designed to provide attractive, convenient and comfortable None are applicable. indoor and outdoor communal areas to be used by residents and visitors. DTS/DPF 29.2 Private open space provision may be substituted for communal open space None are applicable. which is designed and sited to meet the recreation and amenity needs of residents. PO 29 3 DTS/DPF 29 3 Communal open space is of sufficient size and dimensions to cater for group Communal open space incorporates a minimum dimension of 5 metres. recreation PO 29.4 DTS/DPF 29.4 Communal open space is designed and sited to: None are applicable. (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. PO 29.5 DTS/DPF 29.5 Communal open space contains landscaping and facilities that are functional, None are applicable. attractive and encourage recreational use. PO 29.6 **DTS/DPF 29.6** Communal open space is designed and sited to: None are applicable. in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. Site Facilities / Waste Storage PO 30.1 DTS/DPF 30.1 Development is designed to provide storage areas for personal items and None are applicable. specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles. DTS/DPF 30.2 Provision is made for suitable mailbox facilities close to the major pedestrian None are applicable. entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 30.3 **DTS/DPF 28.3** Provision is made for suitable external clothes drying facilities. None are applicable. PO 30.4 DTS/DPF 30.4 Provision is made for suitable household waste and recyclable material storage None are applicable. facilities conveniently located and screened from public view. **DTS/DPF 30.5** Waste and recyclable material storage areas are located away from dwellings. Dedicated waste and recyclable material storage areas are located at least 3m

Page 36 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Folicy24 - Eliquity			
	from any habitable room window.		
PO 30.6	DTS/DPF 30.6		
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.		
PO 30.7	DTS/DPF 30.7		
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.		
All non-residen	tial development		
Water Sen	sitive Design		
PO 31.1	DTS/DPF 31.1		
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to achieve the following gross pollutant outcomes:		
	(a) 90 per cent reduction of litter/gross pollutants compared to untreated stormwater runoff     (b) no visible oils/grease for flows up to the 4 EY (exceedances per year).		
PO 31.2	DTS/DPF 31.2		
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.		
Wash-down and Waste	Loading and Unloading		
PO 32.1	DTS/DPF 32.1		
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, vessels, plant or equipment are:	None are applicable.		
<ul> <li>(a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off</li> </ul>			
(b) paved with an impervious material to facilitate wastewater collection			
(c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area			
(d) designed to drain wastewater to either:			
<ul> <li>a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or</li> </ul>			
(ii) a holding tank and its subsequent removal off-site on a regular basis.			

Table 1 - Private Open Space

Dwelling Type	Minimum Rate	
Dwelling (at ground level)	Total private open space area:  (a) Site area <301m2: 24m2 located behind the building line.  (b) Site area ≥ 301m2: 60m2 located behind the building line.  Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.	
Dwelling (above ground level)	Studio (no separate bedroom): 4m <sup>2</sup> with a minimum dimension 1.8m  One bedroom: 8m <sup>2</sup> with a minimum dimension 2.1m  Two bedroom dwelling: 11m <sup>2</sup> with a minimum dimension 2.4m  Three + bedroom dwelling: 15m <sup>2</sup> with a minimum dimension 2.6m	

Page 37 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park

Total area: 16m<sup>2</sup>, which may be used as second car parking space, provided on each site intended for residential occupation.

## **Design in Urban Areas**

### **Assessment Provisions (AP)**

Desired Outcome			
DO 1	Develo	pment is:	
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
	(b)	durable - fit for purpose, adaptable and long lasting	
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All Dev	elopment
External Appearance	
PO 1.1	DTS/DPF 1.1
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.
PO 1.2	DTS/DPF 1.2
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.
PO 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:  (a) positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces  (b) screening rooftop plant and equipment from view	Development does not incorporate any structures that protrude beyond the roofline.
(c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses.	
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.

Page 38 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Sa	fety
PO 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
PO 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	caping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
<ul> <li>(a) minimise heat absorption and reflection</li> <li>(b) maximise shade and shelter</li> <li>(c) maximise stormwater infiltration</li> <li>(d) enhance the appearance of land and streetscapes.</li> </ul>	
	Il Performance
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	DTS/DPF 4.1  None are applicable.
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open	DTS/DPF 4.1
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	DTS/DPF 4.1  None are applicable.
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3  None are applicable.
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3  None are applicable.
PO 4.1  Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.  Water Sen PO 5.1  Development is sited and designed to maintain natural hydrological systems	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3  None are applicable.  Sitive Design  DTS/DPF 5.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.  Water Sen  PO 5.1  Development is sited and designed to maintain natural hydrological systems without negatively impacting:  (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3  None are applicable.  Sitive Design  DTS/DPF 5.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.  PO 4.2  Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.  PO 4.3  Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.  Water Sen  PO 5.1  Development is sited and designed to maintain natural hydrological systems without negatively impacting:  (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and groundwater (c) the quality and function of natural springs.	DTS/DPF 4.1  None are applicable.  DTS/DPF 4.2  None are applicable.  DTS/DPF 4.3  None are applicable.  sitive Design  DTS/DPF 5.1  None are applicable.

Page 39 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

1 Olicy24 - Linquity		
for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	<ul> <li>(a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space</li> <li>(b) use an area also used as a driveway</li> <li>(c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.</li> </ul>	
Car parking	appearance	
PO 7.1  Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as:  (a) limiting protrusion above finished ground level  (b) screening through appropriate planting, fencing and mounding  (c) limiting the width of openings and integrating them into the building structure.	DTS/DPF 7.1  None are applicable.	
PO 7.2	DTS/DPF 7.2	
Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.	
PO 7.3	DTS/DPF 7.3	
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.	
PO 7.4	DTS/DPF 7.4	
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.	
PO 7.5	DTS/DPF 7.5	
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of:  (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces.	
PO 7.6	DTS/DPF 7.6	
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.	
PO 7.7	DTS/DPF 7.7	
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.	
Earthworks a	nd sloping land	
PO 8.1	DTS/DPF 8.1	
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following:  (a) excavation exceeding a vertical height of 1m  (b) filling exceeding a vertical height of 1m  (c) a total combined excavation and filling vertical height of 2m or more.	
PO 8.2	DTS/DPF 8.2	
Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):	

Page 40 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	do not have a gradient exceeding 25% (1-in-4) at any point along the driveway     are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
do not contribute to the instability of embankments and cuttings     provide level transition areas for the safe movement of people and goods to and from the development     are designed to integrate with the natural topography of the land.	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.
Fences	and walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping is incorporated on the low side of retaining walls that are visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Pi	ivacy (low rise buildings)
PO 10.1  Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses in neighbourhood-type zones.	Upper level windows facing side or rear boundaries shared with a residential use in a neighbourhood-type zone:  (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm  (b) have sill heights greater than or equal to 1.5m above finished floor level incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type zones.	One of the following is satisfied:  (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or  (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:  (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or  (ii) 1.7m above finished floor level in all other cases
Site Facilities / Waste Storage (exclu	uding low rise residential development)
PO 11.1  Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	
PO 11.2	DTS/DPF 11.2

Page 41 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.
PO 11.3	DTS/DPF 11.3
Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	None are applicable.
PO 11.4	DTS/DPF 11.4
Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	None are applicable.
PO 11.5	DTS/DPF 11.5
For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	None are applicable.
All Development - Medium and High Rise	

composting or other waste recovery as appropriate.			
All Development - Medium and High Rise			
External A	ppearance		
D 12.1 DTS/DPF 12.1			
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.		
PO 12.2	DTS/DPF 12.2		
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.		
PO 12.3	DTS/DPF 12.3		
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.		
PO 12.4	DTS/DPF 12.4		
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.		
PO 12.5	DTS/DPF 12.5		
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	Buildings utilise a combination of the following external materials and finishes:		
	(a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration.		
PO 12.6	DTS/DPF 12.6		
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	Building street frontages incorporate:		
	(a) active uses such as shops or offices		
	(b) prominent entry areas for multi-storey buildings (where it is a common entry)		
	(c) habitable rooms of dwellings     (d) areas of communal public realm with public art or the like, where		
	consistent with the zone and/or subzone provisions.		
PO 12.7	DTS/DPF 12.7		
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	Entrances to multi-storey buildings are:		
	(a) oriented towards the street		
	(b) clearly visible and easily identifiable from the street and vehicle parking areas		
	(c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses		
	(d) designed to provide shelter, a sense of personal address and transitional space around the entry		
	(e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors		
	(f) designed to avoid the creation of potential areas of entrapment.		
PO 12.8	DTS/DPF 12.8		

Building services, plant and mechanical equipment are screened from the public realm.

None are applicable.

### Landscaping

#### PO 13.1

Development facing a street provides a well landscaped area that contains a deep soil space to accommodate a tree of a species and size adequate to provide shade, contribute to tree canopy targets and soften the appearance of buildings.

DTS/DPF 13.1

Buildings provide a 4m by 4m deep soil space in front of the building that accommodates a medium to large tree, except where no building setback from front property boundaries is desired.

#### PO 13.2

Deep soil zones are provided to retain existing vegetation or provide areas that can accommodate new deep root vegetation, including tall trees with large canopies to provide shade and soften the appearance of multi-storey buildings. DTS/DPF 13.2

Multi-storey development provides deep soil zones and incorporates trees at not less than the following rates, except in a location or zone where full site coverage is desired.

Site area	Minimum deep soil area	Minimum dimension	Tree / deep soil zones
<300 m <sup>2</sup>	10 m <sup>2</sup>	1.5m	1 small tree / 10 m <sup>2</sup>
300-1500 m <sup>2</sup>	7% site area	3m	1 medium tree / 30 m <sup>2</sup>
>1500 m <sup>2</sup>	7% site area	6m	1 large or medium tree / 60 m <sup>2</sup>
Tree size and site area definitions			
Small tree	4-6m mature height and 2-4m canopy spread		
Medium tree	6-12m mature height and 4-8m canopy spread		
Large tree	12m mature height and >8m canopy spread		
Site area	The total area for development site, not average area per dwelling		

#### PO 13.3

Deep soil zones with access to natural light are provided to assist in maintaining vegetation health.

**DTS/DPF 13.3** 

None are applicable.

#### PO 13.4

Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height.

DTS/DPF 13.4

Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.

#### Environmental

PO 14.1

DTS/DPF 14.1

Development minimises detrimental micro-climatic impacts on adjacent land and buildings.

None are applicable.

PO 14.2

DTS/DPF 14.2

Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.

None are applicable.

Page 43 of 105 Document Set ID: 4151930

PO 14.3

Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:

- a podium at the base of a tall tower and aligned with the street to deflect wind away from the street
- (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas
- (c) the placement of buildings and use of setbacks to deflect the wind at
- (d) avoiding tall shear elevations that create windy conditions at street level.

**DTS/DPF 14.3** 

None are applicable.

Car Parking

PO 15.1

Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings.

DTS/DPF 15.1

Multi-level vehicle parking structures within buildings:

- provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages
- (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings.

PO 15.2

Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.

DTS/DPF 15.2

None are applicable.

None are applicable.

Overlooking/Visual Privacy

PO 16.1

Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:

- appropriate site layout and building orientation
- (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight
- (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms
- (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity.

DTS/DPF 16.1

All residential development

## Front elevations and passive surveillance

PO 17.1

**DTS/DPF 17.1** 

Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.

Each dwelling with a frontage to a public street:

- includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m
- has an aggregate window area of at least 2m<sup>2</sup> facing the primary street.

PO 17.2

DTS/DPF 17.2

Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.

Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.

### Outlook and Amenity

DTS/DPF 18.1

Living rooms have an external outlook to provide a high standard of amenity for occupants.

A living room of a dwelling incorporates a window with an external outlook of the street frontage, private open space, public open space, or waterfront areas.

PO 18.2

DTS/DPF 18.2

Page 44 of 105

Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.

None are applicable.

#### **Ancillary Development**

PO 19.1

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.

DTS/DPF 19.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
  - in front of any part of the building line of the dwelling to which it is ancillary

or

- (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
  - is set back at least 5.5m from the boundary of the primary street
  - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
    - A. for dwellings of single building level 7m in width or 50% of the site frontage, whichever is the lesser
    - for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
  - a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary
  - the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- have a roof height where no part of the roof is more than 5m above the natural ground level
- if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
  - (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m <sup>2</sup> )	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

 the amount of existing soft landscaping prior to the development occurring.

Page 45 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

### PO 19.2 DTS/DPF 19.2 Ancillary buildings and structures do not impede on-site functional requirements Ancillary buildings and structures do not result in: such as private open space provision, car parking requirements or result in overless private open space than specified in Design in Urban Areas Table development of the site. 1 - Private Open Space less on-site car parking than specified in Transport, Access and (b) Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. PO 19.3 **DTS/DPF 19.3** Fixed plant and equipment in the form of pumps and/or filtration systems for a The pump and/or filtration system is ancillary to a dwelling erected on the same swimming pool or spa positioned and/or housed to not cause unreasonable noise site and is: nuisance to adjacent sensitive receivers. enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment (b) located at least 12m from the nearest habitable room located on an adjoining allotment. Residential Development - Low Rise External appearance DTS/DPF 20.1 PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a Garages and carports facing a street: dwelling. are situated so that no part of the garage or carport will be in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening width not exceeding 7m have a garage door / opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street. PO 20.2 DTS/DPF 20.2 Dwelling elevations facing public streets and common driveways make a positive Each dwelling includes at least 3 of the following design features within the contribution to the streetscape and the appearance of common driveway areas. building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway: a minimum of 30% of the building wall is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building wall (c) a balcony projects from the building wall (d) a verandah projects at least 1m from the building wall (e) eaves of a minimum 400mm width extend along the width of the front a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish. PO 20.3 DTS/DPF 20.3 The visual mass of larger buildings is reduced when viewed from adjoining None are applicable allotments or public streets. Private Open Space DTS/DPF 21.1 Dwellings are provided with suitable sized areas of usable private open space to Private open space is provided in accordance with Design in Urban Areas Table

Page 46 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 meet the needs of occupants. 1 - Private Open Space. PO 21.2 DTS/DPF 21.2 Private open space is positioned to provide convenient access from internal Private open space is directly accessible from a habitable room. living areas. Landscaping PO 22.1 DTS/DPF 22.1 Soft landscaping is incorporated into development to: Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b): minimise heat absorption and reflection a total area as determined by the following table: (b) contribute shade and shelter (c) provide for stormwater infiltration and biodiversity enhance the appearance of land and streetscapes. (d) Dwelling site area (or in the case of Minimum residential flat building or group percentage of site dwelling(s), average site area) (m2) <150 10% 150-200 15% >200-450 20% >450 25% (b) at least 30% of any land between the primary street boundary and the primary building line. Car parking, access and manoeuvrability PO 23.1 **DTS/DPF 23.1** Enclosed car parking spaces are of dimensions to be functional, accessible and Residential car parking spaces enclosed by fencing, walls or other structures convenient have the following internal dimensions (separate from any waste storage area): single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space. PO 23.2 DTS/DPF 23.2 Uncovered car parking space are of dimensions to be functional, accessible and Uncovered car parking spaces have: convenient a minimum length of 5.4m (b) a minimum width of 2.4m a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m. PO 23 3 DTS/DPF 23.3 Driveways and access points are located and designed to facilitate safe access Driveways and access points satisfy (a) or (b): and egress while maximising land available for street tree planting, domestic sites with a frontage to a public road of 10m or less, have a width waste collection, landscaped street frontages and on-street parking. between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site sites with a frontage to a public road greater than 10m: have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m.

Page 47 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

### PO 23.4 DTS/DPF 23.4 Vehicle access is safe, convenient, minimises interruption to the operation of Vehicle access to designated car parking spaces satisfy (a) or (b): public roads and does not interfere with street infrastructure or street trees. is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance 6m or more from the tangent point of an intersection of 2 or outside of the marked lines or infrastructure dedicating a pedestrian crossing PO 23.5 DTS/DPF 23.5 Driveways are designed to enable safe and convenient vehicle movements from Driveways are designed and sited so that: the public road to on-site parking spaces. the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site PO 23.6 DTS/DPF 23.6 Driveways and access points are designed and distributed to optimise the Where on-street parking is available abutting the site's street frontage, on-street provision of on-street visitor parking. parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 24.1 DTS/DPF 24.1 Provision is made for the convenient storage of waste bins in a location Where dwellings abut both side boundaries a waste bin storage area is provided screened from public view. behind the building line of each dwelling that: has a minimum area of 2m<sup>2</sup> with a minimum dimension of 900mm (separate from any designated car parking spaces or private open has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. Design of Transportable Buildings PO 25.1 DTS/DPF 25.1 The sub-floor space beneath transportable buildings is enclosed to give the Buildings satisfy (a) or (b): appearance of a permanent structure. (a) are not transportable the sub-floor space between the building and ground level is clad in a (b)

Residential Development - Medium and High Rise (including serviced apartments)

material and finish consistent with the building.

Outlook and Visual Privacy

Page 48 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
PO 26.1	DTS/DPF 26.1
Ground level dwellings have a satisfactory short range visual outlook to public,	Buildings:
communal or private open space.	, and the second
	(a) provide a habitable room at ground or first level with a window facing
	toward the street  (h) limit the height / output of colid wells or forece facing the street to 1.2m.
	(b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site
	frontage.
PO 26.2	DTS/DPF 26.2
The visual privacy of ground level dwellings within multi-level buildings is	The finished floor level of ground level dwellings in multi-storey developments is
protected.	raised by up to 1.2m.
Private O	pen Space
PO 27.1	DTS/DPF 27.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
Residential amenity	n multi-level buildings
PO 28.1	DTS/DPF 28.1
Residential accommodation within multi-level buildings have habitable rooms,	Habitable rooms and balconies of independent dwellings and accommodation are
windows and balconies designed and positioned to be separated from those of	separated by at least 6m from one another where there is a direct line of sight
other dwellings and accommodation to provide visual and acoustic privacy and	between them and 3m or more from a side or rear property boundary.
allow for natural ventilation and the infiltration of daylight into interior and outdoor	
spaces.	
PO 28.2	DTS/DPF 28.2
Releasing are designed, positioned and integrated into the everall architectural	Paleonics utilize one or a combination of the following design elements:
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to:	Balconies utilise one or a combination of the following design elements:
	(a) sun screens
(a) respond to daylight, wind, and acoustic conditions to maximise comfort	(b) pergolas
and provide visual privacy	(c) louvres
<ul> <li>(b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor</li> </ul>	(d) green facades
areas.	(e) openable walls.
PO 28.3	DTS/DPF 28.3
Balconies are of sufficient size and depth to accommodate outdoor seating and	Balconies open directly from a habitable room and incorporate a minimum
promote indoor / outdoor living.	dimension of 2m.
PO 28.4	DTS/DPF 28.4
Dwellings are provided with sufficient space for storage to meet likely occupant	Dwellings (not including student accommodation or serviced apartments) are
needs.	provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:
	(a) studio: not less than 6m <sup>3</sup>
	(b) 1 bedroom dwelling / apartment: not less than 8m <sup>3</sup>
	(c) 2 bedroom dwelling / apartment: not less than 10m <sup>3</sup>
	(d) 3+ bedroom dwelling / apartment: not less than 12m <sup>3</sup> .
	√ 5+ bearoom awelling / apartment; not less than 12m°.
PO 28.5	DTS/DPF 28.5
Dwellings that use light wells for access to daylight, outlook and ventilation for habitable rooms, are designed to ensure a reasonable living amenity is provided.	Light wells:
nabilable rooms, are designed to ensure a reasonable living amenity is provided.	(a) are not used as the primary source of outlook for living rooms
	(b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m
	if overlooked by bedrooms
	(c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.
PO 28.6	DTS/DPF 28.6
Attached or abutting dwellings are designed to minimise the transmission of	None are applicable.
sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	
PO 28.7	DTS/DPF 28.7
	'

Page 49 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.

None are applicable.

### Dwelling Configuration

PO 29.1

DTS/DPF 29.1

Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.

Buildings containing in excess of 10 dwellings provide at least one of each of the following:

- studio (where there is no separate bedroom)
- (b) 1 bedroom dwelling / apartment with a floor area of at least 50m<sup>2</sup>
- (c) 2 bedroom dwelling / apartment with a floor area of at least  $65 \text{m}^2$
- (d) 3+ bedroom dwelling / apartment with a floor area of at least 80m<sup>2</sup>, and any dwelling over 3 bedrooms provides an additional 15m<sup>2</sup> for every additional bedroom.

PO 29.2

DTS/DPF 29.2

Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.

None are applicable.

#### Common Areas

PO 30.1

DTS/DPF 30.1

The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.

Common corridor or circulation areas:

- (a) have a minimum ceiling height of 2.7m
- (b) provide access to no more than 8 dwellings
- (c) incorporate a wider section at apartment entries where the corridors exceed 12m in length from a core.

Group Dwellings, Residential Flat Buildings and Battle axe Development

#### Amenity

PO 31.1

DTS/DPF 31.1

Dwellings are of a suitable size to provide a high standard of amenity for

Battle-axe development is appropriately sited and designed to respond to the

Dwellings have a minimum internal floor area in accordance with the following

occupants.  Divenings have a minimum mema noor area in accordance we table:		area in accordance with the following
	Number of bedrooms	Minimum internal floor area
	Studio	35m <sup>2</sup>
	1 bedroom	50m <sup>2</sup>
	2 bedroom	65m <sup>2</sup>
	3+ bedrooms	80m <sup>2</sup> and any dwelling over 3 bedrooms provides an additional 15m <sup>2</sup> for every additional bedroom
PO 31.2	DTS/DPF 31.2	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.	
PO 31.3	DTS/DPF 31.3	
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.	

DTS/DPF 31 4

Page 50 of 105 Document Set ID: 4151930

existing neighbourhood context.

Dwelling sites/allotments are not in the form of a battle-axe arrangement.

Policy24 - Enquiry	
Communal	Open Space
PO 32.1	DTS/DPF 32.1
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 32.2	DTS/DPF 32.2
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 32.3	DTS/DPF 32.3
Communal open space is designed and sited to:	None are applicable.
<ul><li>(a) be conveniently accessed by the dwellings which it services</li><li>(b) have regard to acoustic, safety, security and wind effects.</li></ul>	
PO 32.4	DTS/DPF 32.4
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 32.5	DTS/DPF 32.5
Communal open space is designed and sited to:	None are applicable.
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Car parking, access	and manoeuvrability
PO 33.1	DTS/DPF 33.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	(a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 33.2	DTS/DPF 33.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 33.3	DTS/DPF 33.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:
	(a) have a minimum width of 3m     (b) for driveways servicing more than 3 dwellings:         (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street         (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 33.4	DTS/DPF 33.4
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 33.5	DTS/DPF 33.5
Dwellings are adequately separated from common driveways and manoeuvring	Dwelling walls with entry doors or ground level habitable room windows are set

Page 51 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry		
areas.	back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.	
Soft landscaping		
PO 34.1	DTS/DPF 34.1	
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.	
PO 34.2	DTS/DPF 34.2	
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b):  (a) are constructed of a minimum of 50% permeable or porous material  (b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
	Waste Storage	
PO 35.1  Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	DTS/DPF 35.1  None are applicable.	
PO 35.2	DTS/DPF 35.2	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 35.3	DTS/DPF 35.3	
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.	
located away, or screened, from public view, and     (b) conveniently located in proximity to dwellings and the waste collection point.		
PO 35.4  Waste and recyclable material storage areas are located away from dwellings.	DTS/DPF 35.4  Dedicated waste and recyclable material storage areas are located at least 3m	
	from any habitable room window.	
PO 35.5	DTS/DPF 35.5	
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.	
PO 35.6	DTS/DPF 35.6	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
Water sensitiv	e urban design	
PO 36.1	DTS/DPF 36.1	
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
PO 36.2	DTS/DPF 36.2	
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
Supported Accommodation	on and retirement facilities	

Policy24 - Enquiry	
Siting, Configur	ation and Design
PO 37.1	DTS/DPF 37.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
PO 37.2	DTS/DPF 37.2
Universal design features are incorporated to provide options for people living	None are applicable.
with disabilities or limited mobility and / or to facilitate ageing in place.	"
Movement	and Access
PO 38.1	DTS/DPF 38.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
<ul> <li>(a) ground-level access or lifted access to all units</li> <li>(b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places</li> <li>(c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability</li> <li>(d) kerb ramps at pedestrian crossing points.</li> </ul>	
	Open Space
PO 39.1	DTS/DPF 39.1
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.
PO 39.2	DTS/DPF 39.2
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 39.3	DTS/DPF 39.3
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 39.4	DTS/DPF 39.4
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services     (b) have regard to acoustic, safety, security and wind effects.	
PO 39.5	DTS/DPF 39.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 39.6	DTS/DPF 39.6
Communal open space is designed and sited to:	None are applicable.
<ul> <li>(a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings</li> <li>(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.</li> </ul>	
Site Facilities /	Waste Storage
PO 40.1	DTS/DPF 40.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.
PO 40.2	DTS/DPF 40.2

Page 53 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

### Policy24 - Enquiry

Policy24 - Enquiry		
Provision is made for suitable mailbox facilities close to the major pedestrian	None are applicable.	
entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.		
PO 40.3	DTS/DPF 40.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 40.4	DTS/DPF 40.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.	
PO 40.5	DTS/DPF 40.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 406	DTS/DPF 40.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 40.7	DTS/DPF 40.7	
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.	
Student Ac	commodation	
PO 41.1	DTS/DPF 41.1	
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.  PO 41.2  Student accommodation is designed to provide easy adaptation of the building to	such as one-bedroom, two-bedroom and disability access units  (b) common or shared facilities to enable a more efficient use of space, including:  (i) shared cooking, laundry and external drying facilities  (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space  (iii) common storage facilities at the rate of 8m³ for every 2 dwellings or students  (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas  (v) bicycle parking at the rate of one space for every 2 students.	
accommodate an alternative use of the building in the event it is no longer required for student housing.		
All non-residential development		
Water Sen	sitive Design	
PO 42.1	DTS/DPF 42.1	
Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
PO 42.2	DTS/DPF 42.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	
PO 42.3	DTS/DPF 42.3	
Development includes stormwater management systems to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to	None are applicable.	

Page 54 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 ensure that development does not increase peak flows in downstream systems. Wash-down and Waste Loading and Unloading PO 43.1 DTS/DPF 43.1 Areas for activities including loading and unloading, storage of waste refuse bins None are applicable. in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: designed to contain all wastewater likely to pollute stormwater within a (a) bunded and roofed area to exclude the entry of external surface stormwater run-off (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme (ii) a holding tank and its subsequent removal off-site on a regular basis.

Laneway Development

#### Infrastructure and Access

#### PO 44.1

Development with a primary street comprising a laneway, alley, lane, right of way or similar minor thoroughfare only occurs where:

- existing utility infrastructure and services are capable of accommodating the development
- (b) the primary street can support access by emergency and regular service vehicles (such as waste collection)
- it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

#### DTS/DPF 44.1

Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site  Configuration	Minimum Rate
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area:  (a) Site area <301m2: 24m2 located behind the building line.  (b) Site area ≥ 301m2: 60m2 located behind the building line.  Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m <sup>2</sup> , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which incorporate above ground level dwellings	Dwellings at ground level:  Dwellings above ground level:	15m <sup>2</sup> / minimum dimension 3m
	Studio (no separate bedroom)	4m <sup>2</sup> / minimum dimension 1.8m

Page 55 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

## Policy24 - Enquiry

One bedroom dwelling	8m² / minimum dimension 2.1m
Two bedroom dwelling	11m <sup>2</sup> / minimum dimension 2.4m
Three + bedroom dwelling	15 m <sup>2</sup> / minimum dimension 2.6m

# **Forestry**

### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Si	ting
PO 1.1	DTS/DPF 1.1
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).
PO 1.3	DTS/DPF 1.3
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.
PO 1.4	DTS/DPF 1.4
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from a reserve gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> .
Water F	rotection
PO 2.1	DTS/DPF 2.1
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.
PO 2.2	DTS/DPF 2.2
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	Commercial forestry plantations:     do not involve cultivation (excluding spot cultivation) in drainage lines     are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer)     are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).

Page 56 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
Fire M	anagement
PO 3.1	DTS/DPF 3.1
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide:
	(a) 7m or more wide external boundary firebreaks for plantations of 40ha of less
	(b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha
	(c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.
PO 3.2	DTS/DPF 3.2
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plantation fire management access tracks:
	(a) are incorporated within all firebreaks
	<ul><li>(b) are 7m or more wide with a vertical clearance of 4m or more</li><li>(c) are aligned to provide straight through access at junctions, or if they</li></ul>
	are a no through access track are appropriately signposted and provide
	suitable turnaround areas for fire-fighting vehicles  (d) partition the plantation into units of 40ha or less in area.
	(-) partition the plantation into drints of 401d of 1605 in drea.
Power-lii	ne Clearances
PO 4.1	DTS/DPF 4.1
Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.  Commercial forestry plantations incorporating trees with an height of greater than 6m meet the clearance requirements table:	
	Voltage of transmission line  Tower or Pole  Minimum horizontal clearance distance between plantings and transmission lines
	500 kV Tower 38m
	275 kV Tower 25m
	132 kV Tower 30m
	132 kV Pole 20m
	66 kV Pole 20m
	Less than 66 kV Pole 20m

## **Housing Renewal**

## **Assessment Provisions (AP)**

Desired Outcome				
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.			

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 57 of 105 Document Set ID: 4151930 Printed on 21/04/2021

Performance	Deemed-to-Satisfy Criteria / Designated Performance		
Outcome	Feature		
	Land Use and Intensity		
PO 1.1	DTS/DPF 1.1		
Residential development provides a range of housing choices.	Development comprises one or more of the following:  (a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.		
PO 1.2	DTS/DPF 1.2		
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.		
	Building Height		
PO 2.1	DTS/DPF 2.1		
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).		
PO 2.2	DTS/DPF 2.2		
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.		
	Primary Street Setback		
PO 3.1	DTS/DPF 3.1		
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.		
	Secondary Street Setback		
PO 4.1	DTS/DPF 4.1		
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.		
	Boundary Walls		
PO 5.1  Boundary walls are limited in height and length to manage	DTS/DPF 5.1  Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary wall are sited on only one side boundary and satisfy (a) or (b):		

Page 58 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	4 - Enquiry	
visual in	npacts and access to	
natural light and ventilation.		(a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height
		(b) do not:
		(i) exceed 3.2m in height from the lower of the natural or finished ground level
		(ii) exceed 11.5m in length
		<ul><li>(iii) when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary</li></ul>
		(iv) encroach within 3 metres of any other existing or proposed boundary walls on the subject land.
		( ) one cash within a matter of any action extenting of proposed scandary mails on the suspectanta.
PO 5.2		DTS/DPF 5.2
-	gs in a semi-	Dwellings in a semi-detached or row arrangement are set back 900mm or more from side boundaries shared with allotments outside
	ed, row or terrace	the development site, except for a carport or garage.
-	ment maintain space n buildings consistent	
	uburban streetscape	
characte	· ·	
		Side Boundary Setback
PO 6.1		DTS/DPF 6.1
Building	s are set back from	Other than walls located on a side boundary, buildings are set back from side boundaries:
side bou	undaries to provide:	(a) at least 000 mm where the well being to a
(a)	separation between	<ul> <li>(a) at least 900mm where the wall height is up to 3m</li> <li>(b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m</li> </ul>
	dwellings in a way	(c) at least 1.9m plus 1/3 of the wall height above 3m for walls facing a southern side boundary.
	that contributes to a	Control of the contro
(b)	suburban character access to natural	
(D)	light and ventilation	
	for neighbours.	
		Door Doundary Cathook
		Rear Boundary Setback
PO 7.1		DTS/DPF 7.1
•	s are set back from	Dwellings are set back from the rear boundary:
rear bou	undaries to provide:	(2) One on many fact the first to vilding layer
(a)	separation between	(a) 3m or more for the first building level  (b) 5m or more for any subsequent building level.
(-)	dwellings in a way	(5) Sitt of thore for any subsequent building level.
	that contributes to a	
(b)	suburban character access to natural	
(D)	light and ventilation	
	for neighbours	
(c)	private open space	
(d)	space for	
	landscaping and vegetation.	
		Buildings elevation design
PO 8.1		DTS/DPF 8.1
1 0 0.1		
	g elevations facing	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 c
Dwelling public st	treets and common	
Dwelling public st driveway	treets and common ys make a positive	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway
Dwelling public st driveway contribut	treets and common ys make a positive Ition to the	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line
Dwelling public st driveway contribut streetsca	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation
Dwelling public st driveway contribut	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation
Dwelling public st driveway contribut streetsca	treets and common ys make a positive tion to the ape and common	<ul> <li>(b) a porch or portico projects at least 1m from the building elevation</li> <li>(c) a balcony projects from the building elevation</li> </ul>
Dwelling public st driveway contribut streetsca	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation
Dwelling public st driveway contribut streetsca	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation
Dwelling public st driveway contribut streetsca	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation  (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm.
Dwelling public st driveway contribut streetsca driveway	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation  (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm.  (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.
Dwelling public st driveway contribut streetsca driveway	treets and common ys make a positive tion to the ape and common y areas.	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation  (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm.  (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.
Dwelling public st driveway contribut streetsca driveway	treets and common ys make a positive tion to the ape and common	the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway  (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line  (b) a porch or portico projects at least 1m from the building elevation  (c) a balcony projects from the building elevation  (d) a verandah projects at least 1m from the building elevation  (e) eaves of a minimum 400mm width extend along the width of the front elevation  (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm.  (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.

Page 59 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

### Policy24 - Enquiry

Policy24 - Enquiry				
encourage passive surveillance and make a positive contribution to the streetscape.	2.4m  (b) has an aggregate window area of at least 2m <sup>2</sup> facing the primary street			
PO 8.3	DTS/DPF 8.3			
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.			
PO 8.4	DTS/DPF 8.4			
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.			
PO 8.5	DTS/DPF 8.5			
Entrances to multi-storey buildings are:	None are applicable.			
(a) oriented towards     the street     (b) visible and easily     identifiable from the     street     (c) designed to include     a common mail box     structure.				
		Outlook and amenity		
PO 9.1  Living rooms have an external outlook to provide a high standard of amenity for occupants.	DTS/DPF 9.1  A living room of a dwelling incorporates a window with an external outlook towards the street frontage or private open space.			
PO 9.2	DTS/DPF 9.2			
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.			
		Private Open Space		
PO 10.1	DTS/DPF 10.1			
Dwellings are provided with suitable sized areas of usable private open space to	Private open space is provided in accordance with the following table:			
meet the needs of occupants.	Dwelling Type	Dwelling / Site  Configuration	Minimum Rate	
	Dwelling (at ground level)		Total area: 24m <sup>2</sup> located behind the building line	
			Minimum adjacent to a living room: 16m <sup>2</sup> with a minimum dimension 3m	
	Dwelling (above ground level)	Studio	4m <sup>2</sup> / minimum dimension 1.8m	
•	• •	•	,	

Page 60 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

		One bedroom dwelling	8m² / minimum dimension 2.1m		
		Two bedroom dwelling	11m <sup>2</sup> / minimum dimension 2.4m		
		Three + bedroom dwelling	15 m <sup>2</sup> / minimum dimension 2.6m		
PO 10.2	DTS/DPF 10.2		_		
Private open space positioned to provide convenient access from internal living areas.	At least 50% of the required area of private open space is accessible from a habitable room.				
PO 10.3	DTS/DPF 10.3				
Private open space is positioned and designed to:	None are applicable.				
provide useable outdoor space that suits the needs of occupants;      (b) take advantage of desirable orientation and vistas; and      (c) adequately define public and private space.					
	<u> </u>	Visual privacy			
PO 11.1	DTS/DPF 11.1	· · ·			
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with another residential allotment/site satisfy one of the following:  (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm  (b) have sill heights greater than or equal to 1.5m above finished floor level  (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5m above the finished floor.				
PO 11.2	DTS/DPF 11.2				
Development mitigates direct	One of the following is satisfied:				
overlooking from upper level balconies and terraces to habitable rooms and private	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or				
open space of adjoining residential uses.	(b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25%				
	transparency/openings fixed to a minimum height of:  (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land  or  (ii) 1.7m above finished floor level in all other cases				
	Landscaping				
PO 12.1 DTS/DPF 12.1					
Soft landscaping is incorporated into development to:	Residential development incorporates pervious areas for soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b):				
(a) a total area as determined by the following table:  (a) minimise heat					
absorption and reflection  (b) maximise shade	Dwelling site area (or in the o	case of residential flat building or group a) (m²)	Minimum percentage of site		
and shelter					

Page 61 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

,_	. =q,			
(c)	maximise stormwater	<	150	10%
(d)	infiltration and biodiversity	<2	200	15%
	enhance the appearance of land	20	01-450	20%
	and streetscapes.	>4	450	25%
		(b) a	at least 30% of land between the road boundary and the building line.	
			Water Sensitive Design	
PO 13.1		DTS/DPF 1	13.1	
Residential development is designed to capture and use stormwater to:		None are	applicable.	
(a)	maximise efficient use of water resources			
(b)	manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded			
(c)	manage runoff quality to maintain, as close as practical, pre- development conditions.			
			Car Parking	
PO 14.1		DTS/DPF 1	4.1	
	car parking is d to meet the	On-site c	ar parking is provided at the following rates per dwelling:	
anticipated demand of residents, with less on-site parking in areas in close proximity to public transport.		(a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.		
PO 14.2		DTS/DPF 1	14.2	
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.		waste sto	ial parking spaces enclosed by fencing, walls or other obstructions with the following orage area):  single parking spaces:  (i) a minimum length of 5.4m  (ii) a minimum width of 3.0m	g internal dimensions (separate from any
		(b) (	<ul> <li>(iii) a minimum garage door width of 2.4m</li> <li>double parking spaces (side by side): <ul> <li>(i) a minimum length of 5.4m</li> <li>(ii) a minimum width of 5.5m</li> <li>(iii) minimum garage door width of 2.4m per space.</li> </ul> </li> </ul>	
PO 14.3		DTS/DPF 1	4.3	
Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.		(a) a	ed car parking spaces have: a minimum length of 5.4m a minimum width of 2.4m a minimum width between the centre line of the space and any fence, wall or other	obstruction of 1.5m.
PO 14.4 DTS/DPF 14.4				

Page 62 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

### Policy24 - Enquiry

Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.  PO 14.5  Residential flat buildings provide dedicated areas for bicycle parking.	Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.  DTS/DPF 14.5  Residential flat buildings provide one bicycle parking space per dwelling.  Overshadowing		
PO 15.1	DTS/DPF 15.1		
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.		
	Waste		
PO 16.1	DTS/DPF 16.1		
Provision is made for the convenient storage of waste bins in a location screened from public view.	A waste bin storage area is provided behind the primary building line that:      has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and      has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.		
PO 16.2	DTS/DPF 16.2		
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:  (a) easily and safely accessible for residents and for collection vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.	None are applicable.		
Vehicle Access			
PO 17.1  Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	DTS/DPF 17.1  None are applicable.		

Page 63 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

#### PO 17.2 DTS/DPF 17.2 Vehicle access is safe, Vehicle access to designated car parking spaces satisfy (a) or (b): convenient, minimises is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part interruption to the operation of an application for the division of land of public roads and does not (b) where newly proposed, is set back: interfere with street 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure or street trees infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser (iii) 6m or more from the tangent point of an intersection of 2 or more roads outside of the marked lines or infrastructure dedicating a pedestrian crossing. PO 17.3 DTS/DPF 17.3 Driveways are designed to Driveways are designed and sited so that: enable safe and convenient (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or vehicle movements from the carport is not more than 1-in-4 on average public road to on-site (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the parking spaces. centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide (c) along the boundary of the allotment / site. PO 17.4 DTS/DPF 17.4 Driveways and access Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following points are designed and requirements: distributed to optimise the 1. minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) provision of on-street parking. 2. Minimum car park length of 5.4m where a vehicle can enter or exit a space directly 3. minimum car park length of 6m for an intermediate space located between two other parking spaces. PO 17.5 **DTS/DPF 17.5** Residential driveways that Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following service more than one requirements: dwelling of a dimension to (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) allow safe and convenient (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly movement (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. PO 17.6 DTS/DPF 17.6 Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and Residential driveways that exit the garages or parking spaces in no more than a three-point turn manoeuvre service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner PO 17.7 DTS/DPF 17 7 Dwellings are adequately Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles. separated from common driveways and manoeuvring areas. Storage PO 18.1 **DTS/DPF 18.1** Dwellings are provided with Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling: sufficient and accessible (a) space for storage to meet studio: not less than 6m3 likely occupant needs. (b) 1 bedroom dwelling / apartment: not less than 8m<sup>3</sup>

Page 64 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	(c) 2 bedroom dwelling / apartment: not less than 10m <sup>3</sup>		
	(d) 3+ bedroom dwelling / apartment: not less than 12m <sup>3</sup> .		
	S SOLIOSIN ATOMING APARTICINATION INC.		
	Earthworks		
PO 19.1	DTS/DPF 19.1		
Development, including any associated driveways and	The development does not involve:		
access tracks, minimises the	(a) excavation exceeding a vertical height of 1m		
need for earthworks to limit	or		
disturbance to natural (b) filling exceeding a vertical height of 1m			
topography.	(c) a total combined excavation and filling vertical height exceeding 2m.		
	Service connections and infrastructure		
PO 20.1	DTS/DPF 20.1		
Dwellings are provided with appropriate service	The site and building:		
connections and	(a) have the ability to be connected to a permanent potable water supply		
infrastructure.	(b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011		
(c) have the ability to be connected to electricity supply			
	(d) have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes		
	(e) would not be contrary to the Regulations prescribed for the purposes of Section 86 of the <i>Electricity Act 1996</i> .		
	Site contamination		
PO 21.1	DTS/DPF 21.1		
Land that is suitable for	Development satisfies (a), (b), (c) or (d):		
sensitive land uses to			
provide a safe environment.  (a) does not involve a change in the use of land			
(b) involves a change in the use of land that does not constitute a change to a more sensitive use			
	(c) involves a change in the use of land to a <u>more sensitive use</u> on land at which <u>site contamination</u> does not exist (as demonstrated in a <u>site contamination declaration form</u> )		
(d) involves a change in the use of land to a <u>more sensitive use</u> on land at which <u>site contamination</u> exists, or mademonstrated in a site contamination declaration form), and satisfies both of the following:			
	(i) <u>a site contamination audit report</u> has been prepared under Part 10A of the <i>Environment Protection Act 1993</i> in relation to the land within the previous 5 years which states that		
	A. <u>site contamination</u> does not exist (or no longer exists) at the land or		
	B. the land is suitable for the proposed use or range of uses (without the need for any further <u>remediation</u> ) or		
	C. where <u>remediation</u> is, or remains, necessary for the proposed use (or range of uses), <u>remediation work</u> has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)		
	and		
	(ii) no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a <u>site contamination declaration form</u> ).		

# Infrastructure and Renewable Energy Facilities

## **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 65 of 105
Document Set ID: 4151930

Printed on 21/04/2021

### **Performance Outcome** Deemed-to-Satisfy Criteria / **Designated Performance Feature** General DTS/DPF 1.1 PO 1.1 Development is located and designed to minimise hazard or nuisance to adjacent None are applicable. development and land uses. Visual Amenity PO 2.1 DTS/DPF 2.1 The visual impact of above-ground infrastructure networks and services None are applicable. (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by: utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers. PO 2.2 DTS/DPF 2.2 Pumping stations, battery storage facilities, maintenance sheds and other None are applicable. ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land. PO 2.3 DTS/DPF 2.3 Surfaces exposed by earthworks associated with the installation of storage None are applicable. facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land. Rehabilitation PO 3.1 DTS/DPF 3.1 Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead None are applicable. of or upon decommissioning of areas used for renewable energy facilities and transmission corridors. Hazard Management PO 4.1 DTS/DPF 4.1 Infrastructure and renewable energy facilities and ancillary development located None are applicable. and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips. PO 4.2 DTS/DPF 4.2 Facilities for energy generation, power storage and transmission are separated None are applicable. as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction. PO 4.3 DTS/DPF 4.3 Bushfire hazard risk is minimised for renewable energy facilities by providing None are applicable. appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds. Electricity Infrastructure and Battery Storage Facilities PO 5.1 DTS/DPF 5.1

Page 66 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
siting utilities and services:         (i) on areas already cleared of native vegetation         (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity	
(b) grouping utility buildings and structures with non-residential development, where practicable.	
PO 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.
Telecommunic	tation Facilities
PO 6.1	DTS/DPF 6.1
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.
PO 6.2	DTS/DPF 6.2
Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.
PO 6.3	DTS/DPF 6.3
Telecommunications facilities, particularly towers/monopoles, are located and sized to mitigate visual impacts by the following methods:	None are applicable.
(a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose	
or all of the following:	
(b) using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services	
(c) using materials and finishes that complement the environment	
<ul> <li>(d) screening using landscaping and vegetation, particularly for equipment shelters and huts.</li> </ul>	
Renewable Er	nergy Facilities
PO 7.1	DTS/DPF 7.1
Renewable energy facilities are located as close as practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure.	None are applicable.
Renewable Energy F	acilities (Wind Farm)
PO 8.1	DTS/DPF 8.1
Visual impact of wind turbine generators on the amenity of residential and tourist development is reduced through appropriate separation.	Wind turbine generators are:  (a) set back at least 2000m from the base of a turbine to any of the following zones:
	(i) Rural Settlement Zone (ii) Township Zone
	(iii) Rural Living Zone

Page 67 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	(iv) Rural Neighbourhood Zone  with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine).  (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation	
PO 8.2	DTS/DPF 8.2	
The visual impact of wind turbine generators on natural landscapes is managed by:	None are applicable.	
designing wind turbine generators to be uniform in colour, size and shape     coordinating blade rotation and direction		
(c) mounting wind turbine generators on tubular towers as opposed to lattice towers.		
PO 8.3	DTS/DPF 8.3	
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applicable.	
PO 8.4	DTS/DPF 8.4	
Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.	
PO 8.5	DTS/DPF 8.5	
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applicable.	
Renewable Energy F	acilities (Solar Power)	
PO 9.1	DTS/DPF 9.1	
Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applicable.	
PO 9.2	DTS/DPF 9.2	
Ground mounted solar power facilities allow for movement of wildlife by:	None are applicable.	
incorporating wildlife corridors and habitat refuges     avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.		
PO 9.3	DTS/DPF 9.3	
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria:	
	Generation Capacity Size of array From adjoining land boundary Setback from adjoining land boundary Setback from adjoining land boundary Setback from Township, Rural Settlement, Rural Neighbourhood and Rural Living Zones1	
	50MW> 80ha+ 30m 500m 2km	
	10MW<50MW 16ha-<80ha 25m 500m 1.5km	
	5MW<10MW 8ha to <16ha 20m 500m 1km	
	1MW<5MW 1.6ha to 15m 500m 500m <8ha	
ı	1	

Page 68 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes:				
	Does not apple facility is located	-		sed ground mo	unted solar power
PO 9.4	DTS/DPF 9.4				
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applica	able.			
Hydropower / Pumper	d Hydropower Faciliti	es			
PO 10.1	DTS/DPF 10.1				
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applica	able.			
PO 10.2	DTS/DPF 10.2				
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applica	able.			
PO 10.3	DTS/DPF 10.3				
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applica	able.			
Water	Supply				
PO 11.1	DTS/DPF 11.1				
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	•				ated water scheme g requirements of th
PO 11.2	DTS/DPF 11.2				
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.	mains water sup development. W tanks capable of (a) exclusiv	oply with the cap there this is not f holding at leas wely for domesti	pacity to mee available it is st 50,000 litre c use	et the requireme s serviced by a	rainwater tank or h is:
	er Services				
PO 12.1  Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following:	development. W	osal service wit here this is not	h the capacit available it is	ty to meet the re s instead capabl	oved common equirements of the le of being serviced with the following:
(a) it is wholly located and contained within the allotment of the development	-	tem is wholly loo		ntained within th	ne allotment of
it will service	develop				
•	(b) the syst	tem will comply Health Act 2011		uirements of the	South Australian

Ino to o	Into India
PO 12.2	DTS/DPF 12.2
Effluent drainage fields and other wastewater disposal areas are maintained to	Development is not built on, or encroaches within, an area that is, or will be,
ensure the effective operation of waste systems and minimise risks to human	required for a sewerage system or waste control system.
health and the environment.	Toquinou tot a contollago ojetem et masto control ojetem
neath and the environment.	
Tempora	ry Facilities
PO 13.1	DTS/DPF 13.1
In rural and remote locations, development that is likely to generate significant	A waste collection and disposal service is used to dispose of the volume of waste
waste material during construction, including packaging waste, makes provision	at the rate it is generated.
for a temporary on-site waste storage enclosure to minimise the incidence of	
wind-blown litter.	
Wild blown litter.	
PO 13.2	DTS/DPF 13.2
Temporary facilities to support the establishment of renewable energy facilities	None are applicable.
(including borrow pits, concrete batching plants, laydown, storage, access roads	• • • • • • • • • • • • • • • • • • • •
and worker amenity areas) are sited and operated to minimise environmental	
impact.	
IIIIpact.	

#### **Intensive Animal Husbandry and Dairies**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	d Design
PO 1.1	DTS/DPF 1.1
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.
PO 1.2	DTS/DPF 1.2
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.
PO 1.3	DTS/DPF 1.3
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.
PO 1.4	DTS/DPF 1.4
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.
PO 1.5	DTS/DPF 1.5

Page 70 of 105 Document Set ID: 4151930

•	ns for the storage or treatment of milking shed effluent is adequately ted from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.	
	Wa	/aste	
PO 2.1		DTS/DPF 2.1	
•	e of manure, used litter and other wastes (other than waste water lagoons), designed, constructed and managed to:	None are applicable.	
(a) (b) (c)	avoid attracting and harbouring vermin avoid polluting water resources be located outside 1% AEP flood event areas.		
	Soil and Wa	ater Protection	
PO 3.1		DTS/DPF 3.1	
	id environmental harm and adverse effects on water resources, intensive husbandry operations are appropriately set back from:  public water supply reservoirs major watercourses (third order or higher stream) any other watercourse, bore or well used for domestic or stock water supplies.	Intensive animal husbandry operations are set back:  (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.	
PO 3.2		DTS/DPF 3.2	
	ve animal husbandry operations and dairies incorporate appropriately ed effluent and run-off facilities that:	None are applicable.	
(a)	have sufficient capacity to hold effluent and runoff from the operations on site		
(b)	ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.		

#### **Interface between Land Uses**

#### **Assessment Provisions (AP)**

Desired Outcome		
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
General Land	Use Compatibility	
PO 1.1	DTS/DPF 1.1	
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.	None are applicable.	
Hours of Operation		

Page 71 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021 PO 2 1 DTS/DPF 2.1 Non-residential development does not unreasonably impact the amenity of Development operating within the following hours: sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for sensitive receivers through its hours of operation having regard to: Hours of operation **Class of Development** (a) the nature of the development (b) measures to mitigate off-site impacts Consulting room 7am to 9pm, Monday to Friday (c) the extent to which the development is desired in the zone 8am to 5pm, Saturday (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land. Office 7am to 9pm, Monday to Friday 8am to 5pm, Saturday Shop, other than any one or 7am to 9pm, Monday to Friday combination of the following: 8am to 5pm, Saturday and Sunday (a) restaurant (b) cellar door in the Productive Rural Landscape Zone. Rural Zone or Rural Horticulture Zone Overshadowing PO 3.1 DTS/DPF 3.1 Overshadowing of habitable room windows of adjacent residential land uses in: North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between a. a neighbourhood-type zone is minimised to maintain access to direct winter 9.00am and 3.00pm on 21 June. sunliaht b. other zones is managed to enable access to direct winter sunlight. DTS/DPF 3.2 PO 3.2 Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in: on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following: a. a neighbourhood type zone is minimised to maintain access to direct winter for ground level private open space, the smaller of the following: b. other zones is managed to enable access to direct winter sunlight. half the existing ground level open space ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m) b. for ground level communal open space, at least half of the existing ground level open space. PO 3.3 DTS/DPF 3.3 Development does not unduly reduce the generating capacity of adjacent rooftop None are applicable solar energy facilities taking into account: (a) the form of development contemplated in the zone the orientation of the solar energy facilities (b) (c) the extent to which the solar energy facilities are already overshadowed. PO 3.4 DTS/DPF 3.4 Development that incorporates moving parts, including windmills and wind farms, None are applicable. are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker. Activities Generating Noise or Vibration

Page 72 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Development that emits noise (other than music) does not unreasonably impact

the amenity of sensitive receivers (or lawfully approved sensitive receivers).

Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.

#### PO 4 2 DTS/DPF 4.2 Areas for the on-site manoeuvring of service and delivery vehicles, plant and None are applicable. equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including: locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers housing plant and equipment within an enclosed structure or acoustic (c) enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. PO 4.3 DTS/DPF 4.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a The pump and/or filtration system ancillary to a dwelling erected on the same site swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive enclosed in a solid acoustic structure located at least 5m from the receivers). nearest habitable room located on an adjoining allotment (b) located at least 12m from the nearest habitable room located on an adjoining allotment. PO 4 4 DTS/DPF 4.4 External noise into bedrooms is minimised by separating or shielding these Adjacent land is used for residential purposes. rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment. PO 4.5 DTS/DPF 4.5 Outdoor areas associated with licensed premises (such as beer gardens or None are applicable. dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers). PO 4.6 DTS/DPF 4.6 Development incorporating music achieves suitable acoustic amenity when Development incorporating music includes noise attenuation measures that will measured at the boundary of an adjacent sensitive receiver (or lawfully approved achieve the following noise levels: sensitive receiver) or zone primarily intended to accommodate sensitive receivers. Assessment location Music noise level Externally at the nearest Less than 8dB above the level of existing or envisaged noise background noise (L<sub>90.15min</sub>) in any octave sensitive location band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB) Air Quality PO 5.1 DTS/DPF 5.1 Development with the potential to emit harmful or nuisance-generating air None are applicable. pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers. PO 5.2 DTS/DPF 5.2 Development that includes chimneys or exhaust flues (including cafes, None are applicable. restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by: incorporating appropriate treatment technology before exhaust (a)

Page 73 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

emissions are released locating and designing chimneys or exhaust flues to maximise the (b) dispersion of exhaust emissions, taking into account the location of sensitive receivers. Light Spill DTS/DPF 6.1 PO 6.1 External lighting is positioned and designed to not cause unreasonable light spill None are applicable. impact on adjacent sensitive receivers (or lawfully approved sensitive receivers). PO 6.2 DTS/DPF 6.2 External lighting is not hazardous to motorists and cyclists. None are applicable. Solar Reflectivity / Glare PO 7.1 DTS/DPF 7.1 Development is designed and comprised of materials and finishes that do not None are applicable. unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare. Electrical Interference PO 8.1 DTS/DPF 8.1 Development in rural and remote areas does not unreasonably diminish or result The building or structure: in the loss of existing communication services due to electrical interference. (a) is no greater than 10m in height, measured from existing ground level is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable. Interface with Rural Activities PO 9.1 DTS/DPF 9.1 Sensitive receivers are located and designed to mitigate impacts from lawfully None are applicable. existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities. PO 9.2 DTS/DPF 9.2 Sensitive receivers are located and designed to mitigate potential impacts from None are applicable. lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities. PO 9.3 DTS/DPF 9.3 Sensitive receivers are located and designed to mitigate potential impacts from Sensitive receivers are located at least 200m from the boundary of a site used lawfully existing land-based aquaculture activities and do not prejudice the for land-based aquaculture and associated components in other ownership. continued operation of these activities. PO 9.4 DTS/DPF 9.4 Sensitive receivers are located and designed to mitigate potential impacts from Sensitive receivers are sited at least 500m from the boundary of a site used for a lawfully existing dairies including associated wastewater lagoons and liquid/solid dairy and associated wastewater lagoon(s) and liquid/solid waste storage and waste storage and disposal facilities and do not prejudice the continued disposal facilities in other ownership. operation of these activities. PO 9.5 DTS/DPF 9.5 Sensitive receivers are located and designed to mitigate the potential impacts Sensitive receivers are located away from the boundary of a site used for the from lawfully existing facilities used for the handling, transportation and storage handling, transportation and/or storage of bulk commodities in other ownership in of bulk commodities (recognising the potential for extended hours of operation) accordance with the following: and do not prejudice the continued operation of these activities. 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a

Page 74 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day	
	(c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres	
	(d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes	
	(e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
PO 9.6	DTS/DPF 9.6	
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.	
PO 9.7	DTS/DPF 9.7	
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.	
Interface with Mines and Quarries (Rural and Remote Areas)		
PO 10.1	DTS/DPF 10.1	
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971</i> .	

#### **Land Division**

#### Assessment Provisions (AP)

Desired Outcome			
DO 1	Land division:		
	<ul> <li>(a) creates allotments with the appropriate dimensions and shape for their intended use</li> <li>(b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure</li> <li>(c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features</li> <li>(d) facilitates solar access through allotment orientation</li> <li>(e) creates a compact urban form that supports active travel, walkability and the use of public transport</li> <li>(f) avoids areas of high natural hazard risk.</li> </ul>		

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	All land division
Allo	otment configuration
PO 1.1	DTS/DPF 1.1
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b):      (a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes      (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.
PO 1.2	DTS/DPF 1.2

Land division considers the physical characteristics of the land, preservation of None are applicable. environmental and cultural features of value and the prevailing context of the locality Design and Layout PO 2.1 DTS/DPF 2.1 Land division results in a pattern of development that minimises the likelihood of None are applicable. future earthworks and retaining walls. PO 2.2 DTS/DPF 2.2 Land division enables the appropriate management of interface impacts between None are applicable. potentially conflicting land uses and/or zones. PO 2 3 DTS/DPF 2.3 Land division maximises the number of allotments that face public open space None are applicable. and public streets. PO 2.4 DTS/DPF 2.4 Land division is integrated with site features, adjacent land uses, the existing None are applicable. transport network and available infrastructure. PO 2.5 DTS/DPF 2.5 Development and infrastructure is provided and staged in a manner that supports None are applicable. an orderly and economic provision of land, infrastructure and services. DTS/DPF 2.6 Land division results in watercourses being retained within open space and None are applicable. development taking place on land not subject to flooding. PO 2.7 DTS/DPF 2.7 Land division results in legible street patterns connected to the surrounding street None are applicable. network PO 2.8 DTS/DPF 2.8 Land division is designed to preserve existing vegetation of value including native None are applicable. vegetation and regulated and significant trees. Roads and Access PO 3.1 DTS/DPF 3.1 Land division provides allotments with access to an all-weather public road. None are applicable. PO 3 2 DTS/DPF 3.2 Street patterns and intersections are designed to enable the safe and efficient None are applicable. movement of pedestrian, cycle and vehicular traffic. PO 3.3 DTS/DPF 3.3 Land division does not impede access to publicly owned open space and/or None are applicable. recreation facilities. PO 3 4 DTS/DPF 3.4 Road reserves provide for safe and convenient movement and parking of None are applicable. projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles PO 3.5 DTS/DPF 3.5 Road reserves are designed to accommodate pedestrian and cycling None are applicable. infrastructure, street tree planting, landscaping and street furniture. PO 3.6 DTS/DPF 3.6 Road reserves accommodate stormwater drainage and public utilities. None are applicable.

Page 76 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
PO 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
PO 3.11	DTS/DPF 3.11
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
Infras	tructure
PO 4.1	DTS/DPF 4.1
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
PO 4.2	DTS/DPF 4.2
each allotment without risk to public health or the environment.	<ul> <li>(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment or</li> <li>(b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.</li> </ul>
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
PO 4.4	DTS/DPF 4.4
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.
PO 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	(Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.

Page 77 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Printed on 21/04/2021

Policy24 - Enquiry	
Solar O	rientation
PO 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sen	sitive Design
PO 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
PO 7.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe	Development
PO 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.
PO 8.2	DTS/DPF 8.2
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:
	(a) has a minimum width of 4m or
	(b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3  Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	DTS/DPF 8.3  Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
PO 8.4	DTS/DPF 8.4
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b):  (a) are constructed of a minimum of 50% permeable or porous material  (b) where the driveway is located directly adjacent the side or rear
	boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Major Land Divisi	on (20+ Allotments)
Open	Space
PO 9.1	DTS/DPF 9.1
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.
PO 9.2	DTS/DPF 9.2
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.
PO 9.3	DTS/DPF 9.3
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.
Water Sen	sitive Design
PO 10.1	DTS/DPF 10.1
Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
	I

PO 10.2	DTS/DPF 10.2
Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
PO 10.3	DTS/DPF 10.3
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
Solar O	rientation
PO 11.1	DTS/DPF 11.1
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.

#### **Marinas and On-Water Structures**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigatio	n and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back:  (a) 3km or more from upstream water supply pumping station take-off points  (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6

Page 79 of 105 Document Set ID: 4151930

Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmental Protection	
PO 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

#### **Open Space and Recreation**

#### **Assessment Provisions (AP)**

	Desired Outcome	
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Land Use	and Intensity
PO 1.1	DTS/DPF 1.1
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
PO 1.2	DTS/DPF 1.2
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Design :	and Siting
PO 2.1	DTS/DPF 2.1
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
PO 2.2	DTS/DPF 2.2
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
PO 2.3	DTS/DPF 2.3
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Pedestrians	s and Cyclists
PO 3.1	DTS/DPF 3.1
Open space incorporates:	None are applicable.
(a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes;	
(b) safe crossing points where pedestrian routes intersect the road network;	
(c) easily identified access points.	
Usa	ability
	<del>-</del>

Page 80 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
PO 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.
	I d Security
PO 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
PO 5.3	DTS/DPF 5.3
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to minimise potential entrapment.	None are applicable.
PO 5.5	DTS/DPF 5.5
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.
Sig	nage
PO 6.1	DTS/DPF 6.1
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.
Buildings ar	nd Structures
PO 7.1	DTS/DPF 7.1
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.
PO 7.2	DTS/DPF 7.2
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.
PO 7.3	DTS/DPF 7.3
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.
PO 7.4	DTS/DPF 7.4
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.
Lands	ccaping
PO 8.1	DTS/DPF 8.1
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.
PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.

along cyclist and pedestrian routes;     around picnic and barbecue areas;     in car parking areas.	
PO 8.3  Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	DTS/DPF 8.3  None are applicable.
PO 8.4  Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	DTS/DPF 8.4  None are applicable.

#### **Out of Activity Centre Development**

**Assessment Provisions (AP)** 

Desired Outcome	
DO1	The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of
	shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1		DTS/DPF 1.1
	sidential development outside Activity Centres of a scale and type that of diminish the role of Activity Centres:	None are applicable.
(a)	as primary locations for shopping, administrative, cultural, entertainment and community services	
(b)	as a focus for regular social and business gatherings	
(c)	in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	
PO 1.2		DTS/DPF 1.2
	activity centre non-residential development complements Activity Centres in the provision of services and facilities:	None are applicable.
(a)	that support the needs of local residents and workers, particularly in underserviced locations	
(b)	at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	

#### **Resource Extraction**

**Assessment Provisions (AP)** 

	Desired Outcome
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy	/ Criteria /
i dilalilalida datadilia	Boolings to Gation,	, official

Page 82 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

	Designated Performance Feature
Land Use and Intensity	
PO 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.
Water Quality	
PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
PO 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

#### **Site Contamination**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d):
	<ul> <li>(a) does not involve a change in the use of land</li> <li>(b) involves a change in the use of land that does not constitute a change to a more sensitive use</li> <li>(c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form)</li> <li>(d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: <ol> <li>(i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that-</li> <li>A. site contamination does not exist (or no longer exists) at the land <ol> <li>or</li> <li>B. the land is suitable for the proposed use or range of uses (without the need for any further remediation)</li> <li>or</li> <li>C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the</li> </ol> </li> </ol></li></ul>

Page 83 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

remediation works will be implemented in association with the development)	
<ul> <li>and</li> <li>no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).</li> </ul>	

#### **Tourism Development**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Ge	neral
PO 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.
<ul> <li>(a) it supports immersive natural experiences</li> <li>(b) it showcases South Australia's landscapes and produce</li> <li>(c) its events and functions are connected to local food, wine and nature.</li> </ul>	
PO 1.2	DTS/DPF 1.2
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	None are applicable.
Caravan and	d Tourist Parks
PO 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
PO 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
PO 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.
PO 2.4	DTS/DPF 2.4
Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.
PO 2.5	DTS/DPF 2.5
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development.	None are applicable.
PO 2.6	DTS/DPF 2.6

Page 84 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Long-term occupation does not displace tourist accommodation, particularly important tourist destinations such as coastal and riverine locations.	in None are applicable.
Tourist accommodation in areas consti	tuted under the National Parks and Wildlife Act 1972
PO 3.1	DTS/DPF 3.1
Tourist accommodation avoids delicate or environmentally sensitive areas su as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	
PO 3.2	DTS/DPF 3.2
Tourist accommodation is sited and designed in a manner that is subservient the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.
PO 3.3	DTS/DPF 3.3
Tourist accommodation and recreational facilities, including associated acce ways and ancillary structures, are located on cleared (other than where clea as a result of bushfire) or degraded areas or where environmental improvem can be achieved.	red
PO 3.4	DTS/DPF 3.4
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.
(a) comprising a minimum of 10 accommodation units	
(b) clustering separated individual accommodation units	
(c) being of a size unsuitable for a private dwelling	
(d) ensuring functional areas that are generally associated with a privat dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are o size unsuitable for a private dwelling.	

#### **Transport, Access and Parking**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Movement	nt Systems
PO 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.

Page 85 of 105 Document Set ID: 4151930

Policy24 - Enquiry	
PO 1.3	DTS/DPF 1.3
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.
PO 1.4	DTS/DPF 1.4
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.
Sigh	ntlines
PO 2.1	DTS/DPF 2.1
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.
PO 2.2	DTS/DPF 2.2
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.
Vehicle	e Access
PO 3.1	DTS/DPF 3.1
Safe and convenient access minimises impact or interruption on the operation of public roads.	
	provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or      not located within 6m of an intersection of 2 or more roads or a
	pedestrian activated crossing.
PO 3.2	DTS/DPF 3.2
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.
PO 3.4	DTS/DPF 3.4
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.
PO 3.5  Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	DTS/DPF 3.5  Vehicle access to designated car parking spaces satisfy (a) or (b):  (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land  (b) where newly proposed, is set back:  (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner  (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance  (iii) 6m or more from the tangent point of an intersection of 2 or more roads  (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 3.6	DTS/DPF 3.6
Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is	Driveways and access points:

Page 86 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.  (a)  (b)  (c)	point no greater than 3.5m in width is provided
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.  (a)  (b)  (c)	elopment does not involve a new or modified access or cause an increase in c through an existing access that is located within the following distance
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.  (a)  (b)  (c)	elopment does not involve a new or modified access or cause an increase in c through an existing access that is located within the following distance
(d	9 80 km/h road - 110m 9 70 km/h road - 90m 9 60 km/h road - 70m
PO 3.8 DTS/	DPF 3.8
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	e are applicable.
PO 3.9 DTS/	DPF 3.9
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	e are applicable.
Access for People with	Disabilities
PO 4.1 DTS/	DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	e are applicable.
Vehicle Parking F	Rates
PO 5.1 DTS/	DPF 5.1
	Parking Requirements  Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas
Vehicle Parking A	Areas
	DPF 6.1
	ement between vehicle parking areas within the site can occur without the d to use a public road.
PO 6.2 DTS/	DPF 6.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	e are applicable.
<del></del>	DPF 6.3
PO 6.3	
	e are applicable.

Page 87 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.
PO 6.5	DTS/DPF 6.5
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.
PO 6.6	DTS/DPF 6.6
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.
PO 6.7	DTS/DPF 6.7
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.
Undercroft and Below Ground G	I Garaging and Parking of Vehicles
PO 7.1	DTS/DPF 7.1
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.
Internal Roads and Parking Areas in Resid	ential Parks and Caravan and Tourist Parks
PO 8.1	DTS/DPF 8.1
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.
PO 8.2	DTS/DPF 8.2
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.
Bicycle Parking in	Designated Areas
PO 9.1	DTS/DPF 9.1
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.
PO 9.2	DTS/DPF 9.2
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.
PO 9.3	DTS/DPF 9.3
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.
Corner	Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:  Corner Cut-Off Area  Allotment Boundary
	Off Area

Page 88 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

#### Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Car Parking Rate (unless varied by Table 2 onwards)
Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space pedwelling.
Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space powerling.
Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
0.2 spaces per dwelling for visitor parking.
0.3 spaces per bed.
No additional requirements beyond those associated with the main dwelling.
Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space powelling.

Page 89 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

0.2 spaces per dwelling for visitor parking.
0.3 spaces per bed.
0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.
A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
1 car parking space per accommodation unit / guest room.
1 space per 100m <sup>2</sup> of building floor area plus an additional 2 spaces.
3 spaces per service bay.
8 spaces per 100m <sup>2</sup> of gross leasable floor area.
3 spaces per service bay.
4 spaces per 100m <sup>2</sup> of gross leasable floor area.
3 spaces per 100m <sup>2</sup> gross leasable floor area.
2.5 spaces per 100m <sup>2</sup> of gross leasable floor area
1 space per 100m <sup>2</sup> of outdoor area used for display purposes.
5.5 spaces per 100m <sup>2</sup> of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
5 spaces per 100m <sup>2</sup> of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for offstreet vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
2.5 spaces per 100m² of gross leasable floor area.
Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.
Premises with take-away service but with no seats - 12 spaces per 100m <sup>2</sup> of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.
Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
0.25 spaces per child
4 spaces per 100m <sup>2</sup> of total floor area.

Page 90 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Policy24 - Enquiry	
Community facility	10 spaces per 100m <sup>2</sup> of total floor area.
Hall / meeting hall	0.2 spaces per seat.
Place of worship	1 space for every 3 visitor seats.
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
Health Related Uses	
Hospital	4.5 spaces per bed for a public hospital.
	1.5 spaces per bed for a private hospital.
Consulting room	4 spaces per consulting room excluding ancillary facilities.
Recreational and Entertainment Uses	
Cinema complex	0.2 spaces per seat.
Concert hall / theatre	0.2 spaces per seat.
Hotel	1 space for every 2m <sup>2</sup> of total floor area in a public bar plus 1 space for every 6m <sup>2</sup> of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.
Indoor recreation facility	6.5 spaces per 100m <sup>2</sup> of total floor area for a Fitness Centre
	4.5 spaces per 100m <sup>2</sup> of total floor area for all other Indoor recreation facilities.
Industry/Employment Uses	
Fuel depot	1.5 spaces per 100m <sup>2</sup> total floor area
	1 spaces per 100m <sup>2</sup> of outdoor area used for fuel depot activity purposes.
Industry	1.5 spaces per 100m <sup>2</sup> of total floor area.
Store	0.5 spaces per 100m <sup>2</sup> of total floor area.
Timber yard	1.5 spaces per 100m <sup>2</sup> of total floor area
	1 space per 100m <sup>2</sup> of outdoor area used for display purposes.
Warehouse	0.5 spaces per 100m <sup>2</sup> total floor area.

Other Uses	
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station	5 spaces per 100m <sup>2</sup> of total building floor area.

#### Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria)
  - 0
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate  Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is:  1 space for each dwelling with a total floor area less than 75 square metres  2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres  3 spaces for each dwelling with a total floor area greater than 150 square metres.  Residential flat building or Residential component of a multi-storey building: 1 visitor space for each 6 dwellings.	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
Non-residential development			
Non-residential development excluding tourist accommodation	3 spaces per 100m <sup>2</sup> of gross leasable floor area.	5 spaces per 100m <sup>2</sup> of gross leasable floor area.	City Living Zone  Urban Corridor (Boulevard) Zone  Urban Corridor (Business) Zone  Urban Corridor (Living) Zone  Urban Corridor (Main Street ) Zone  Urban Neighbourhood Zone
Non-residential development excluding tourist accommodation	3 spaces per 100m <sup>2</sup> of gross leasable floor area.	6 spaces per 100m <sup>2</sup> of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone

Page 92 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	Urban Activity Centre Zone  City Living Zone  Urban Activity Centre Zone  Urban Corridor (Boulevard) Zone  Urban Corridor (Business) Zone  Urban Corridor (Living) Zone
Residential development			Urban Corridor (Main Street ) Zone Urban Neighbourhood Zone
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling  1 bedroom dwelling - 0.75 spaces per dwelling  2 bedroom dwelling - 1 space per dwelling  3 or more bedroom dwelling - 1.25 spaces per dwelling  0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street ) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling  1 bedroom dwelling - 0.75 spaces per dwelling  2 bedroom dwelling - 1 space per dwelling  3 or more bedroom dwelling - 1.25 spaces per dwelling  0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone  Urban Activity Centre Zone  Urban Corridor (Boulevard) Zone  Urban Corridor (Business) Zone  Urban Corridor (Living) Zone  Urban Corridor (Main Street ) Zone  Urban Neighbourhood Zone

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within  Metropolitan Adelaide and any part of the development site satisfies one or more of the following:  (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service <sup>(2)</sup> (b) is within 400 metres of a bus interchange <sup>(1)</sup> (c) is within 400 metres of an O-Bahn interchange <sup>(1)</sup> (d) is within 400 metres of a passenger rail station <sup>(1)</sup> (e) is within 400 metres of a passenger tram station <sup>(1)</sup> (f) is within 400 metres of the Adelaide Parklands.	(a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations:         (i) City of Burnside         (ii) City of Marion         (iii) City of Mitcham  (c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street ) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

#### Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

	Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
ducational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors.
	For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
lospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
ndoor recreation facility	1 space per 4 employees plus 1 space per 200m <sup>2</sup> of gross leasable floor area for visitors.
icensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of ba floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m <sup>2</sup> of gross leasable floor area plus 2 spaces plus 1 space per 1000m <sup>2</sup> of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
Shop	1 space for every 300m <sup>2</sup> of gross leasable floor area plus 1 space for every 600m <sup>2</sup> of gross leasable floor area for customers.
ourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.

#### Schedule to Table 3

Designated Area	Relevant part of the State  The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide
Strategic Innovation Zone	

Page 94 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	
Urban Corridor (Main Street ) Zone	
Urban Neighbourhood Zone	

#### **Waste Treatment and Management Facilities**

#### **Assessment Provisions (AP)**

	Desired Outcome
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Si	ting
PO 1.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.	None are applicable.
Soil and Wa	ter Protection
PO 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as:	None are applicable.
(a) containing potential groundwater and surface water contaminants within waste operations areas	
(b) diverting clean stormwater away from waste operations areas and potentially contaminated areas	
providing a leachate barrier between waste operations areas and underlying soil and groundwater.	
PO 2.2	DTS/DPF 2.2
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.
PO 2.3	DTS/DPF 2.3
Wastewater lagoons are designed and sited to:	None are applicable.
(a) avoid intersecting underground waters;	

Page 95 of 105 Document Set ID: 4151930

<ul> <li>(b) avoid inundation by flood waters;</li> <li>(c) ensure lagoon contents do not overflow;</li> <li>(d) include a liner designed to prevent leakage.</li> </ul>			
PO 2.4	DTS/DPF 2.4		
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.		
Am	enity		
PO 3.1	DTS/DPF 3.1		
Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity.	None are applicable.		
PO 3.2	DTS/DPF 3.2		
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.		
PO 3.3	DTS/DPF 3.3		
Litter control measures minimise the incidence of windblown litter.	None are applicable.		
PO 3.4	DTS/DPF 3.4		
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation.	None are applicable.		
Acc	eess		
PO 4.1	DTS/DPF 4.1		
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction.	None are applicable.		
PO 4.2	DTS/DPF 4.2		
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.		
Fencing a	nd Security		
PO 5.1	DTS/DPF 5.1		
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public.	Chain wire mesh or pre-coated painted metal fencing 2m or more in height is erected along the perimeter of the waste treatment or waste management facility site.		
Lai	ndfill		
PO 6.1	DTS/DPF 6.1		
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.		
PO 6.2	DTS/DPF 6.2		
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.		
PO 6.3	DTS/DPF 6.3		
Landfill facilities are located on land that is not subject to land slip.	None are applicable.		
PO 6.4	DTS/DPF 6.4		
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.		
Organic Waste Processing Facilities			
PO 7.1	DTS/DPF 7.1		
Organic waste processing facilities are separated from the coast to avoid potential environment harm.	Organic waste processing facilities are set back 500m or more from the coastal high water mark.		

Page 96 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

PO 7.2	DTS/DPF 7.2		
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.		
PO 7.3	DTS/DPF 7.3		
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.		
PO 7.4	DTS/DPF 7.4		
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.		
PO 7.5	DTS/DPF 7.5		
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.		
Major Wastewater Treatment Facilities			
PO 8.1	DTS/DPF 8.1		
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.		
PO 8.2	DTS/DPF 8.2		
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.		

#### **Workers' accommodation and Settlements**

#### **Assessment Provisions (AP)**

Desired Outcome			
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.		

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
PO 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 97 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Page 98 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Page 99 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Page 100 of 105
Document Set ID: 4151930
Version: 1, Version Date: 19/07/2021


Page 101 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Page 102 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021


Page 103 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

Page 104 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021


Page 105 of 105 Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

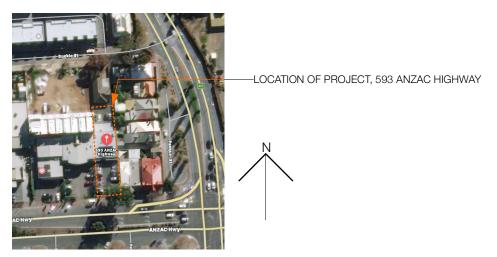

2 LOCATION PLAN Scale: NTS

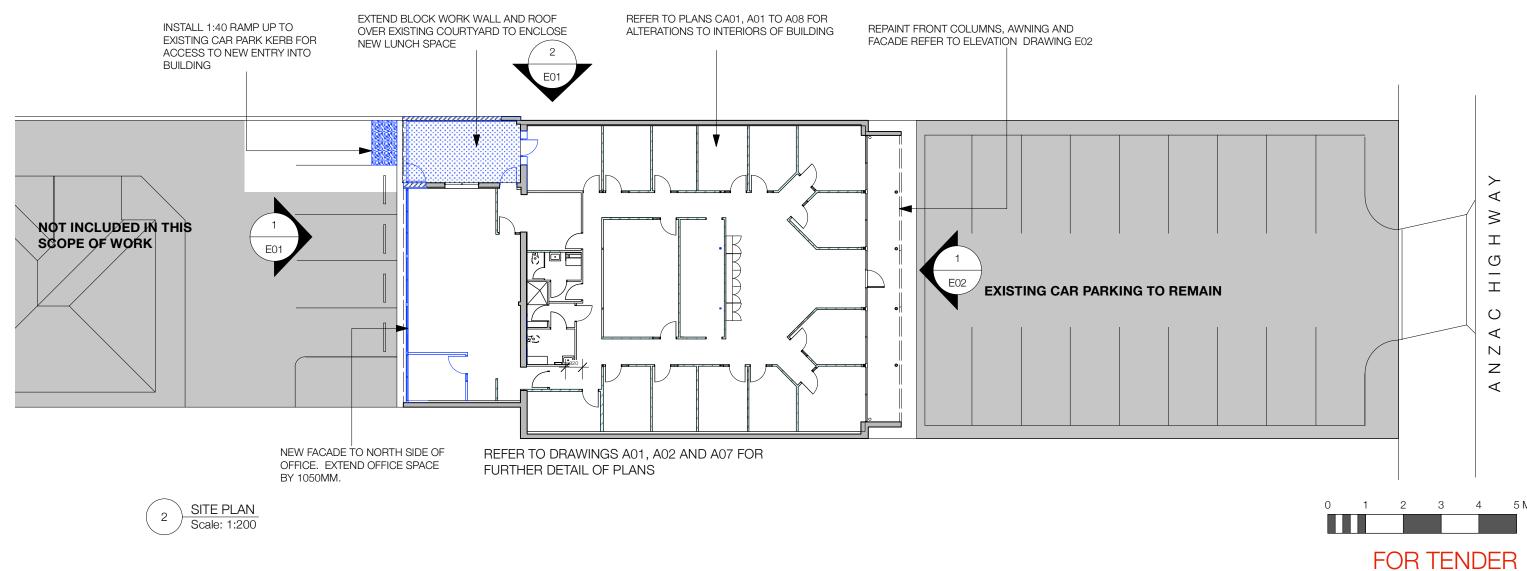

LEGEND LEGEND AMENDMENTS PO Box 3101 Melbourne Street, North Adelaide SA 5006 A 16.04.21 For PLANNING APPROVAL NEW BUILDING WORKS SHOWN IN BLUE T o8 7221 3174 E info@glasgowhart.com.au Glasgow Hart Pty Limited ABN 37 116 010 907 B 18.06.21 For Tender Review Sheridans Accountants & Financial Planners GlasgowHart 593 Anzac Highway, Glenelg It is intended that the drawings represent the visual design of the work. Any technical details are for outline purposes only. The contractor/manufacturer must SITE PLAN + LOCATION PLAN seperately provide all necessary technical diagrams or calculations for compliance with any relevant industry of SCALE safety standards or regulations or by-laws. Check dimensions on site. Use figured dimensions not scaled. В SP01 Check for latest revision issue. Copyright of this drawing APR 2021 1: 200@A3 is vested with GlasgowHart.

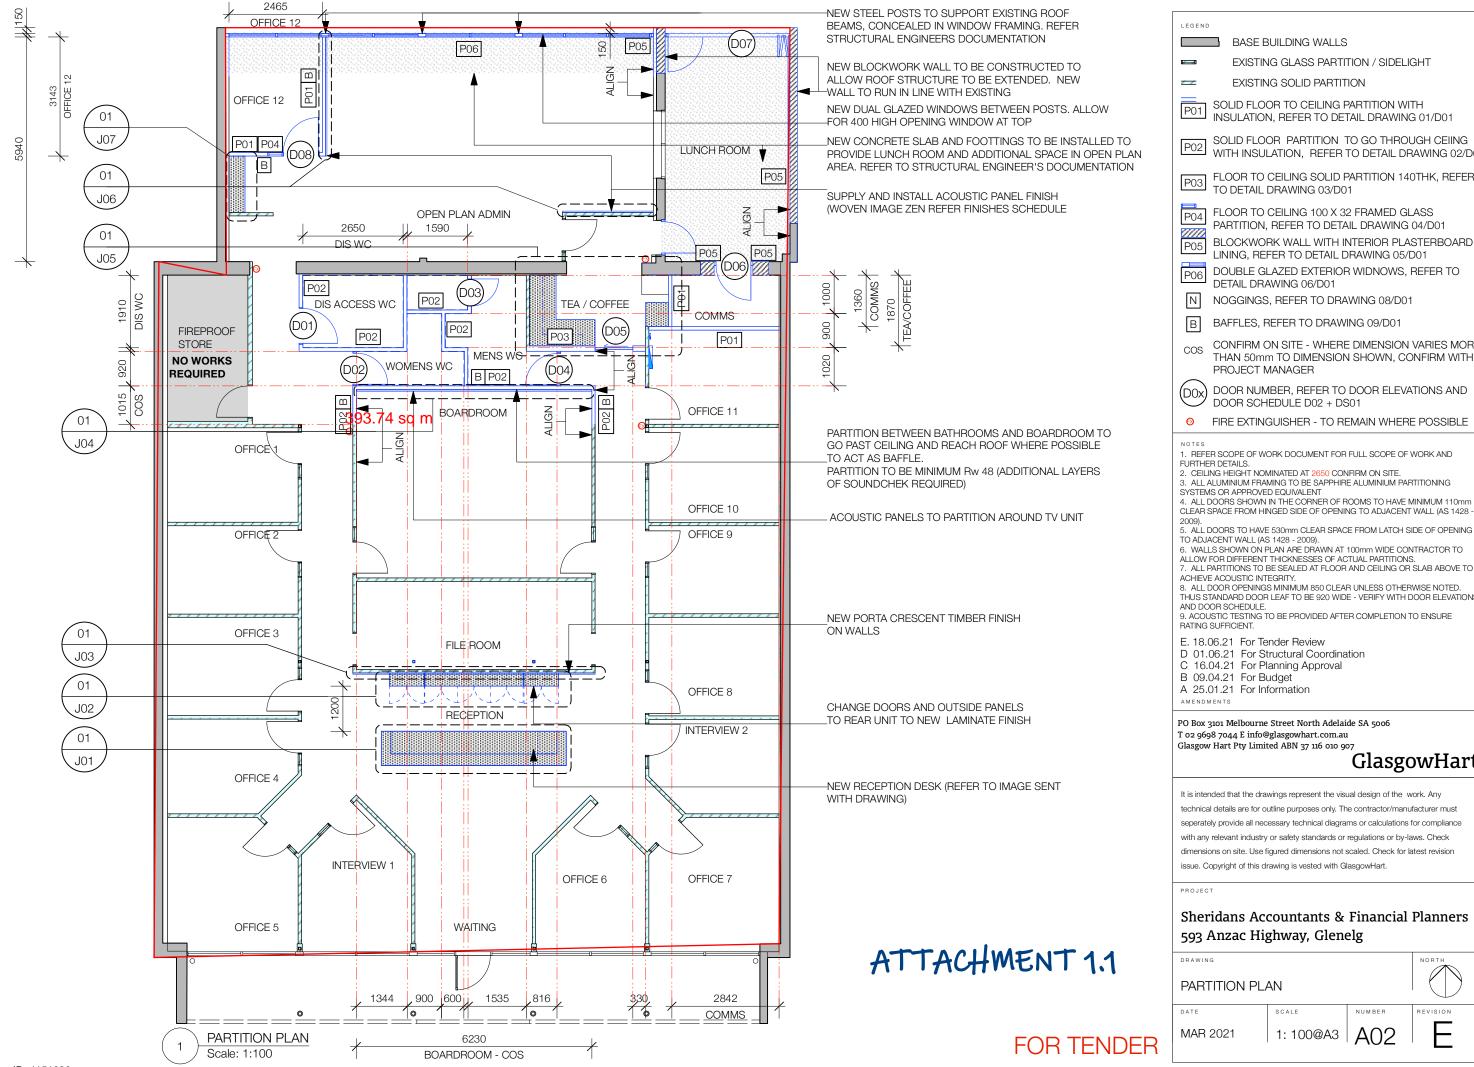

EXISTING GLASS PARTITION / SIDELIGHT SOLID FLOOR TO CEILING PARTITION WITH INSULATION, REFER TO DETAIL DRAWING 01/D01 SOLID FLOOR PARTITION TO GO THROUGH CEIING WITH INSULATION, REFER TO DETAIL DRAWING 02/D0 FLOOR TO CEILING SOLID PARTITION 140THK, REFER FLOOR TO CEILING 100 X 32 FRAMED GLASS PARTITION, REFER TO DETAIL DRAWING 04/D01 BLOCKWORK WALL WITH INTERIOR PLASTERBOARD LINING, REFER TO DETAIL DRAWING 05/D01 DOUBLE GLAZED EXTERIOR WIDNOWS, REFER TO NOGGINGS, REFER TO DRAWING 08/D01 BAFFLES, REFER TO DRAWING 09/D01 CONFIRM ON SITE - WHERE DIMENSION VARIES MORE THAN 50mm TO DIMENSION SHOWN, CONFIRM WITH DOOR NUMBER, REFER TO DOOR ELEVATIONS AND FIRE EXTINGUISHER - TO REMAIN WHERE POSSIBLE . REFER SCOPE OF WORK DOCUMENT FOR FULL SCOPE OF WORK AND 2. CEILING HEIGHT NOMINATED AT 2650 CONFIRM ON SITE.
3. ALL ALUMINIUM FRAMING TO BE SAPPHIRE ALUMINIUM PARTITIONING SYSTEMS OR APPROVED EQUIVALENT
4. ALL DOORS SHOWN IN THE CORNER OF ROOMS TO HAVE MINIMUM 110mm CLEAR SPACE FROM HINGED SIDE OF OPENING TO ADJACENT WALL (AS 1428 5. ALL DOORS TO HAVE 530mm CLEAR SPACE FROM LATCH SIDE OF OPENING TO ADJACENT WALL (AS 1428 - 2009). . WALLS SHOWN ON PLAN ARE DRAWN AT 100mm WIDE CONTRACTOR TO ALLOW FOR DIFFERENT THICKNESSES OF ACTUAL PARTITIONS.

8. ALL DOOR OPENINGS MINIMUM 850 CLEAR UNLESS OTHERWISE NOTED.

THUS STANDARD DOOR LEAF TO BE 920 WIDE - VERIFY WITH DOOR ELEVATIONS


### GlasgowHart

technical details are for outline purposes only. The contractor/manufacturer must seperately provide all necessary technical diagrams or calculations for compliance with any relevant industry or safety standards or regulations or by-laws. Check dimensions on site. Use figured dimensions not scaled. Check for latest revision


## Sheridans Accountants & Financial Planners



Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

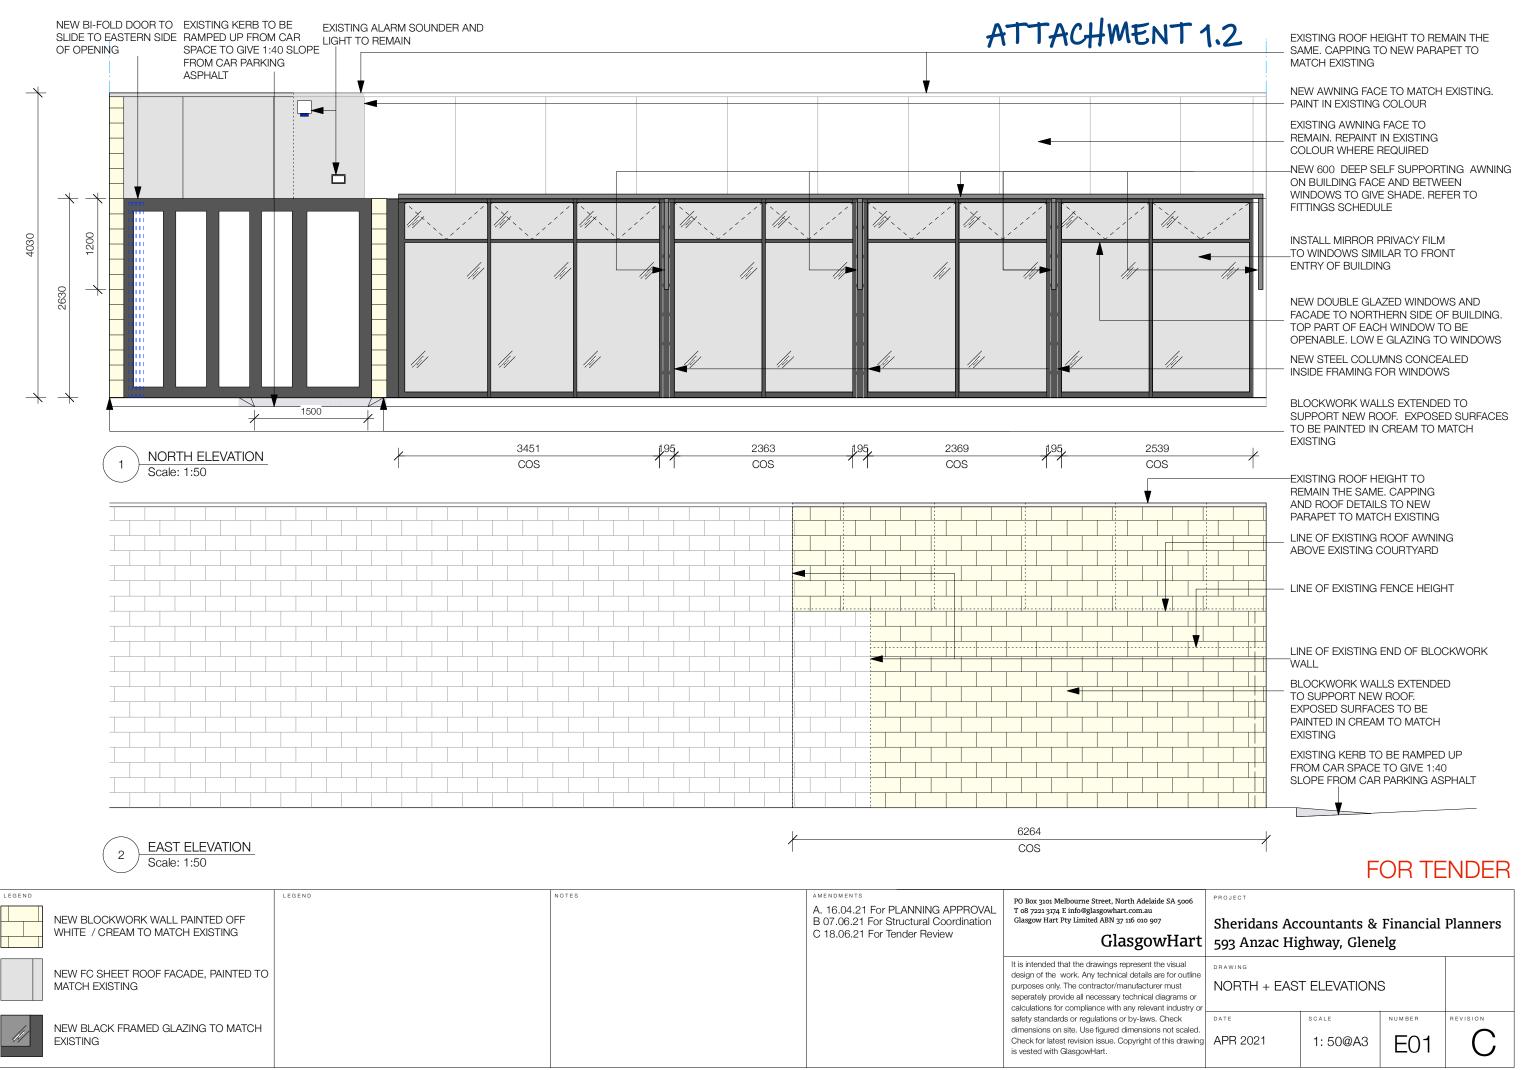


# ATTACHMENT 1.3

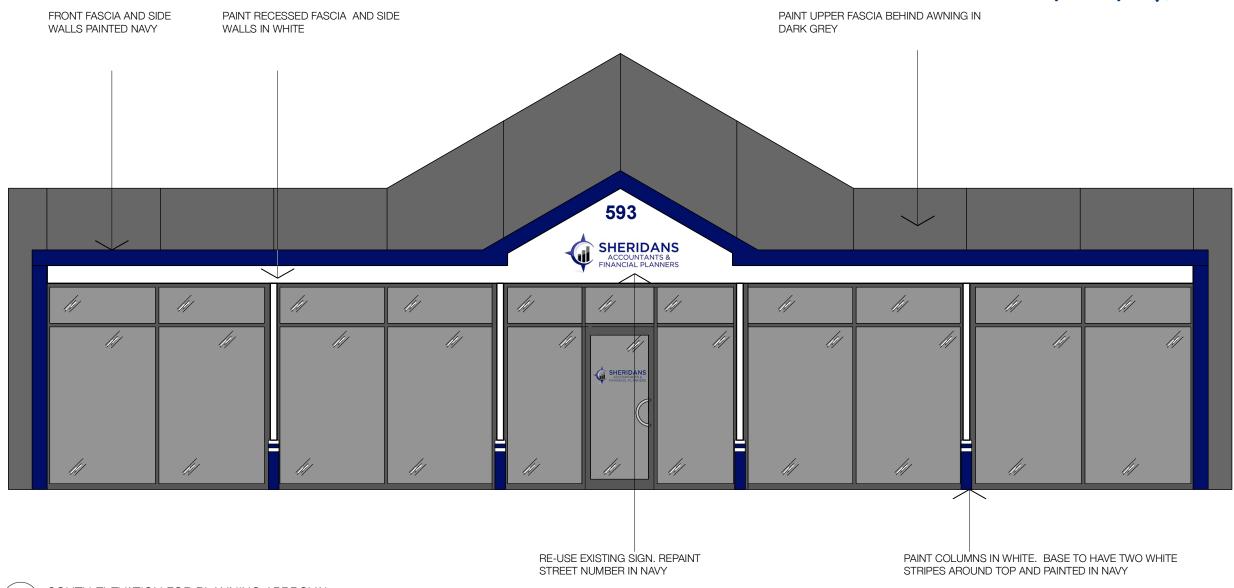


SOUTH ELEVATION FOR PLANNING APPROVAL Scale: 1:50

## FOR TENDER

LEGEND		LEGEND	NOTES	A. 16.04.21 For PLANNING APPROVAL	PO Box 3101 Melbourne Street, North Adelaide SA 5006	PROJECT		
	W4 -REFER FINISHES SCHEDULE			B 18.06.21 For Tender Review	T 08 7221 3174 E info@glasgowhart.com.au Glasgow Hart Pty Limited ABN 37 116 010 907 GlasgowHart	Sheridans Accountants & 593 Anzac Highway, Glen		Planners
	W5 - REFER FINISHES SCHEDULE				It is intended that the drawings represent the visual design of the work. Any technical details are for outline purposes only. The contractor/manufacturer must seperately provide all necessary technical diagrams or calculations for compliance with any relevant industry or	SOUTH ELEVATION		
	W6 - REFER FINISHES SCHEDULE				safety standards or regulations or by-laws. Check dimensions on site. Use figured dimensions not scaled. Check for latest revision issue. Copyright of this drawing is vested with GlasgowHart.	DATE SCALE	E02	B

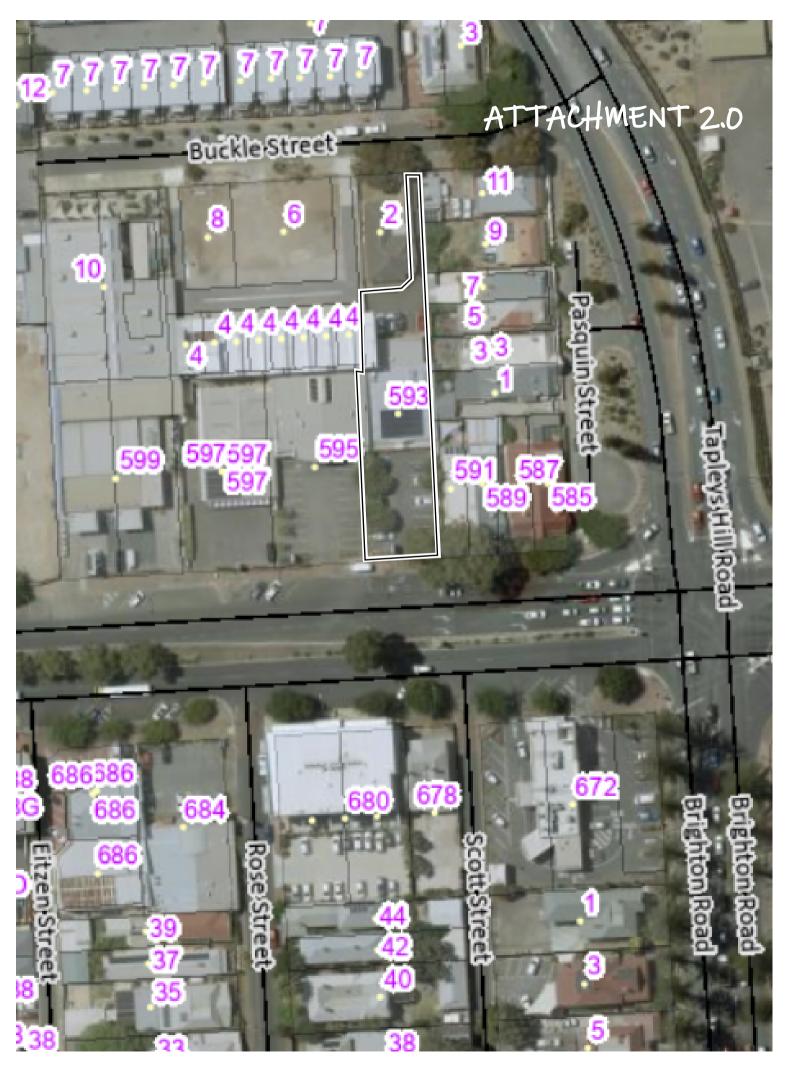

Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

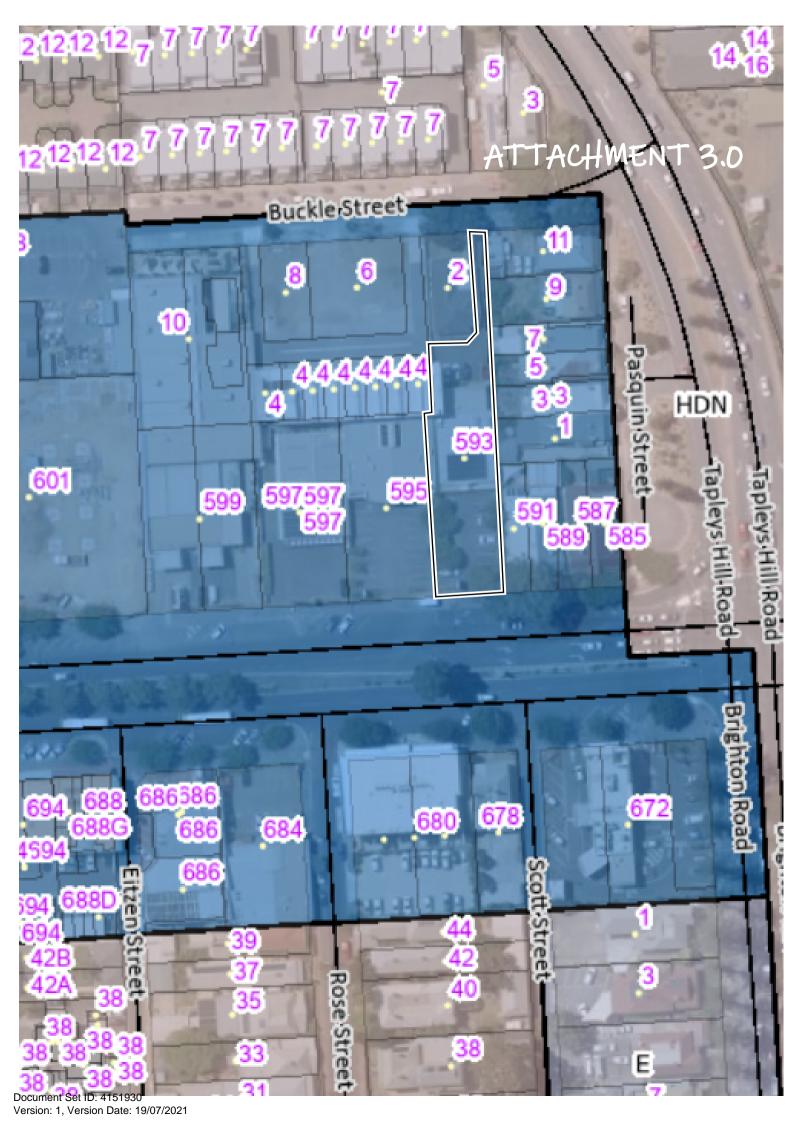

## ATTACHMENT 4.0

## South Australia Planning, Development and Infrastructure ACT 2016

Representation on Application

Representation on Application
First name:
Angus
Last name:
McCurdie
Daytime Phone:
82951312
Would you like to present your submission in person at a hearing?  C I wish to be heard in support of my representation
I do not wish to be heard in support of my representation
My position is:
© I support the development C I support the development with some concerns (detail below) C I oppose the development
The specific reasons I believe that planning consent should be granted/refused are
Attached Documents
File
No records to display.

Document Set ID: 4151930 Version: 1, Version Date: 19/07/2021

#### South Australia

Planning, Development and Infrastructure Act 2016

### Representation on Application – Performance Assessed Development

Development Number:	
Nature of Development:	
Address of Subject Land:	
My name*:	My phone number:
My postal address*: 589 Anzac Hgw * Indicates mandatory information	My email:
My position is:  I support the development  I support the development with  I oppose the development	n some concerns (detail below)
don't give two hoots wh	t in me voicing my our experience howing hway since 1997, council at residents think as
) Sex shop opened right	residential homen
) Application to Install to council is they can be	Solar Panels, biggest concer- seen from Tapleys Hill Rd.
No Faith in Hold fo	ast counci ([attach additional pages as needed]

Note: In order for this submission to be valid, it must:

- · be in writing; and
- include the name and address of the person (or persons) who are making the representation; and
- set out the particular reasons why planning consent should be granted or refused; and
  - Comment only on the performance-based elements of the proposal, any accepted or deemed-tosatisfy elements of the development.

